


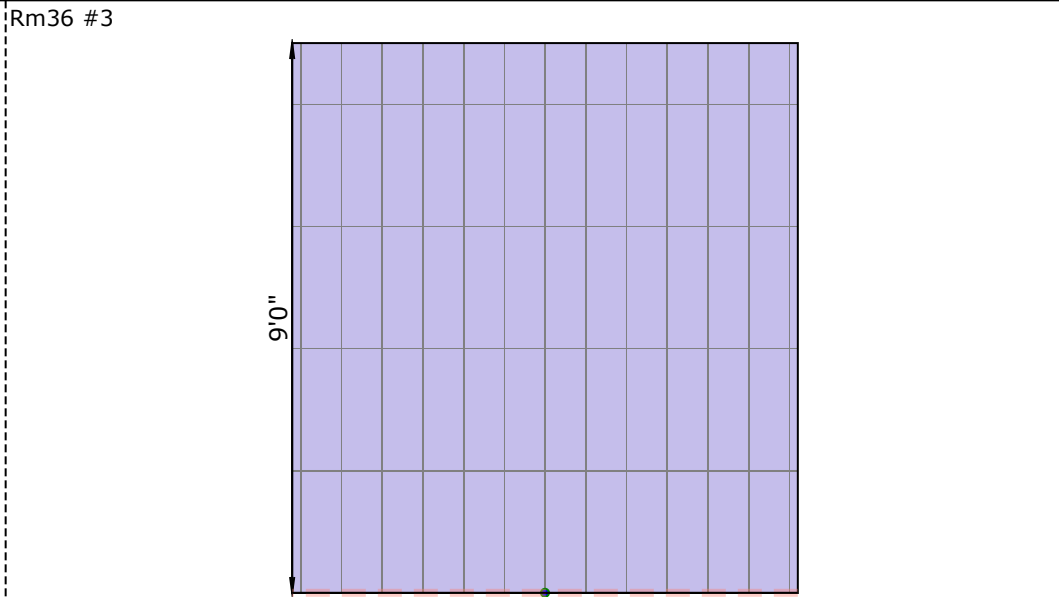
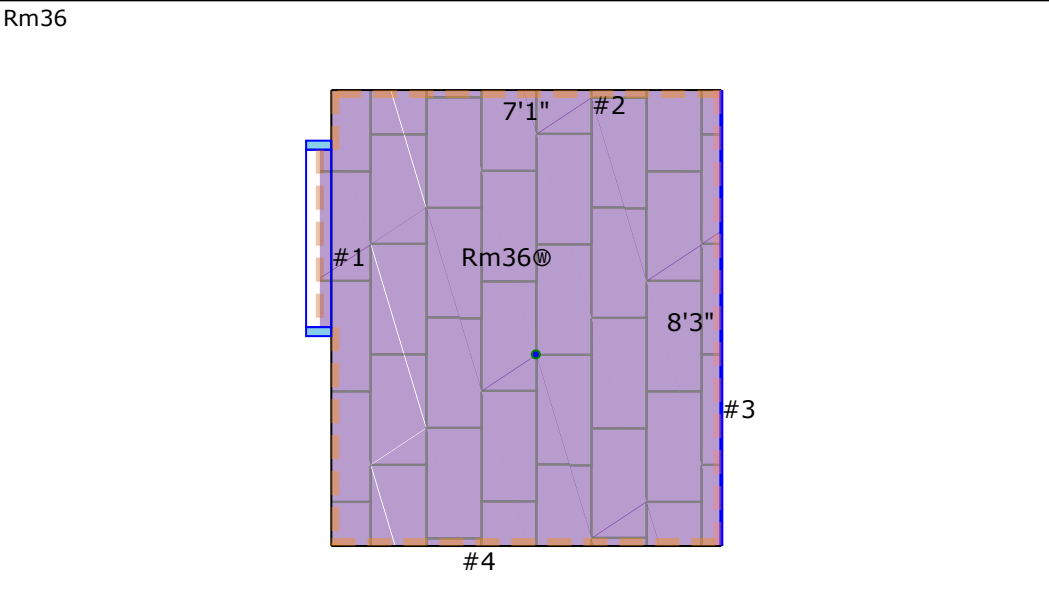
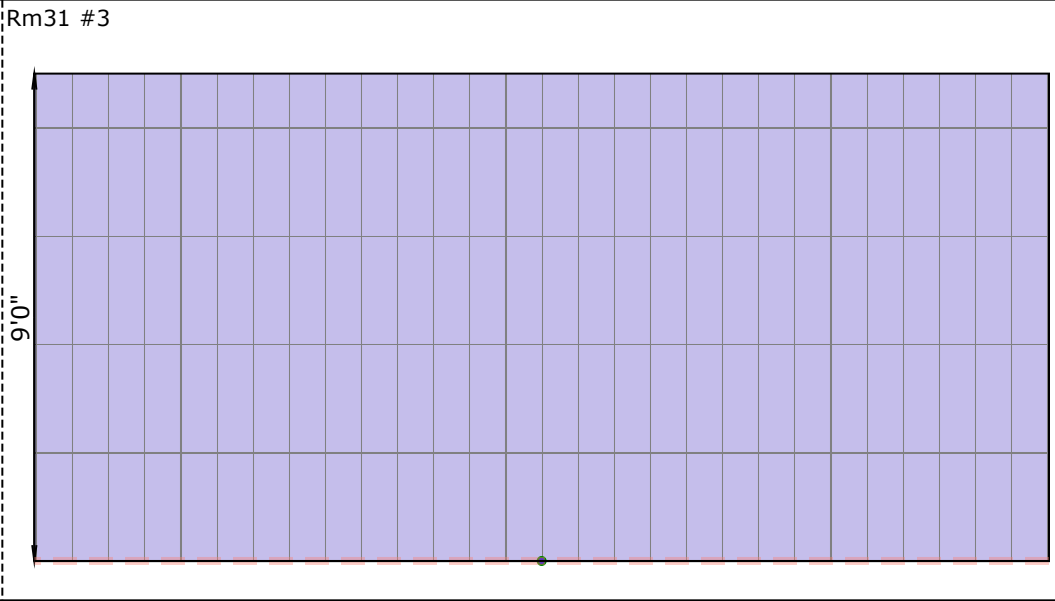
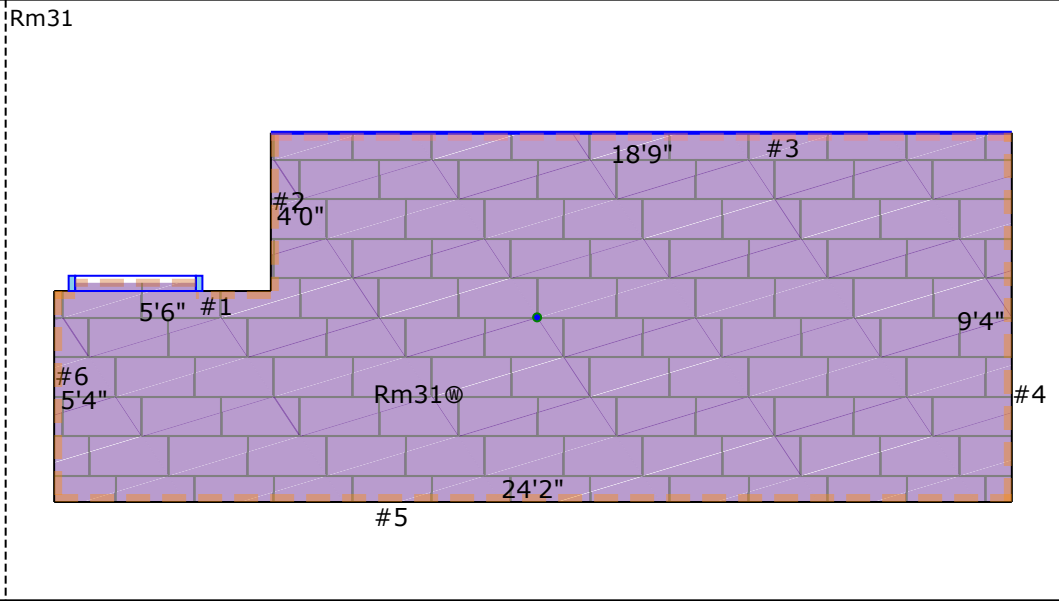
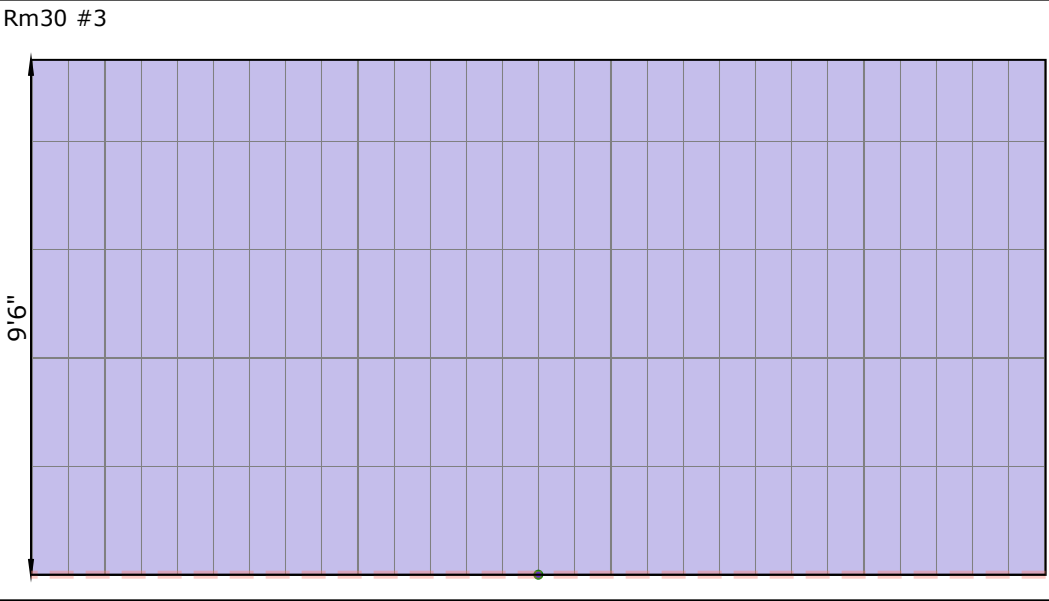



Customer		Job Site					
Item Description	Usage	Linear Length	Net Area	Base Peri	Seam Length	Full; Split; Edge	Waste*
 HTB1 4" LF [2] Crossville, Alaska, Glacier, Bullnose [Grout- Laticrete, Smoke Grey]	186.0 LF		175.2 LF				6.2%
 HTF1 12" x 24" SF [2] Crossville, Alaska ASK04.1 1224, Glacier UPS [Grout- Laticrete, Smoke Grey]	768.60 SF (85.4000 SY) (385PCs)		663.76 SF (73.7517 SY)	248'5"		247; 119; 248'8"	15.8%
 HTW1 8" x 24" SF [2] American Olean, Color Story, Balance 0034, Matte [Grout- TBS]	756.00 SF (84.0000 SY) (567PCs)		678.87 SF (75.4297 SY)	0"		432; 108; 147'5"	11.4%
 LVT1[2] 18" x 18" SF Shaw Contract, Function 2.5 4386V, Change 86520	18,913.12 SF (2,101.4575 SY) (8406PCs)		17,537.39 SF (1,948.5989 SY)	3446'11"		6100; 2061; 4109'3"	7.8%
 LVT2[2] 18" x 18" SF Shaw Contract, Function 2.5 4386V, Pebble 86504	2,764.78 SF (307.1975 SY) (1229PCs)		2,500.73 SF (277.8591 SY)	500'9"		854; 339; 682'10"	10.6%
 PC1 SF Polished Concrete, [2] with Densifyier, Exposed Aggregate, Class B Salt and Pepper Finish, Level 2 Satin Gloss	16,906.19 SF (1,878.4659 SY)		16,906.19 SF (1,878.4659 SY)	1871'2"			0.0%
 RB1 4" LF Johnsonite, Tarkett, Baseworks, [2] 32 Pebble WG with Toe	6,290.6 LF		6,107.4 LF				3.0%
 RB1 ISC EA To Match	442.9		430.0				3.0%
 RB1 OSC EA To Match	109.2		106.0				3.0%
 RB2 4" LF Johnsonite, Tarkett, Baseworks, [2] TG2 Shark Fin CG with Toe	589.6 LF		572.5 LF				3.0%
 RB2 ISC EA To Match	35.0		34.0				3.0%
 RB2 OSC EA To Match	14.4		14.0				3.0%
 RB3 4" LF [2] Johnsonite, Millwork Wall Finishing System Wall Base, Monument, 32 Pebble WG	100.1 LF		97.2 LF				3.0%
 RF1 17-1/2" x 17-1/2" SF Mannington, Teles, [2] Coastal Fog 851	2,613.31 SF (290.3680 SY) (1229PCs)		2,440.69 SF (271.1878 SY)	489'0"		1019; 174; 351'0"	7.1%
 RF2 17-1/2" x 17-1/2" SF Mannington, Teles, [2] Dew Drop 850	392.11 SF (43.5674 SY) (185PCs)		371.39 SF (41.2657 SY)	238'1"		142; 37; 75'5"	5.6%
 RF3 17-1/2" x 17-1/2" SF [2] Mannington Commercial, Teles, Great Lakes 997	858.69 SF (95.4101 SY) (404PCs)		804.88 SF (89.4312 SY)	254'2"		332; 60; 162'11"	6.7%
 SC1 SF BASF Building Systems, Materkure HD 200WD, Clear	786.23 SF (87.3585 SY)		786.23 SF (87.3585 SY)	309'0"			0.0%
 T1 0" LF [2] Schluter, VinPro S, Brushed Nickel Anodized Aluminum ATGB	44.1 LF		44.1 LF				0.0%
 T2 0" LF [2] Schluter, VinPro U, Brushed Nickel Anodized Aluminum ATGB	12.0 LF		12.0 LF				0.0%
 T3 0" LF [2] Schluter, Reno U, Brushed Stainless Steel EB	18.7 LF		18.7 LF				0.0%
T4 0" LF [2] Johnsonite, Slimline SLT-xx, Pebble WG	21.6 LF		21.6 LF				0.0%
T5 0" LF [2] Schluter, Dilex EHK, Brushed Stainless Steel	75.4 LF		73.2 LF				3.0%
TR05 0" LF Transition- LVT to Existing	37.1 LF		36.0 LF				3.0%
WOC1 24" x 24" SY Shaw, Steppin Out, Welcome II, Color TBS	69.5822 SY (626.24 SF) (157PCs)		61.8070 SY (556.26 SF)	126'7"		78; 74; 205'5"	12.6%
WPCI- Tile Floors SF Waterproofing/Crack Isolation	723.02 SF (80.3356 SY)		723.02 SF (80.3356 SY)	248'5"			0.0%
* For roll products, the waste is waste ratio; for others, the waste is waste addon.							

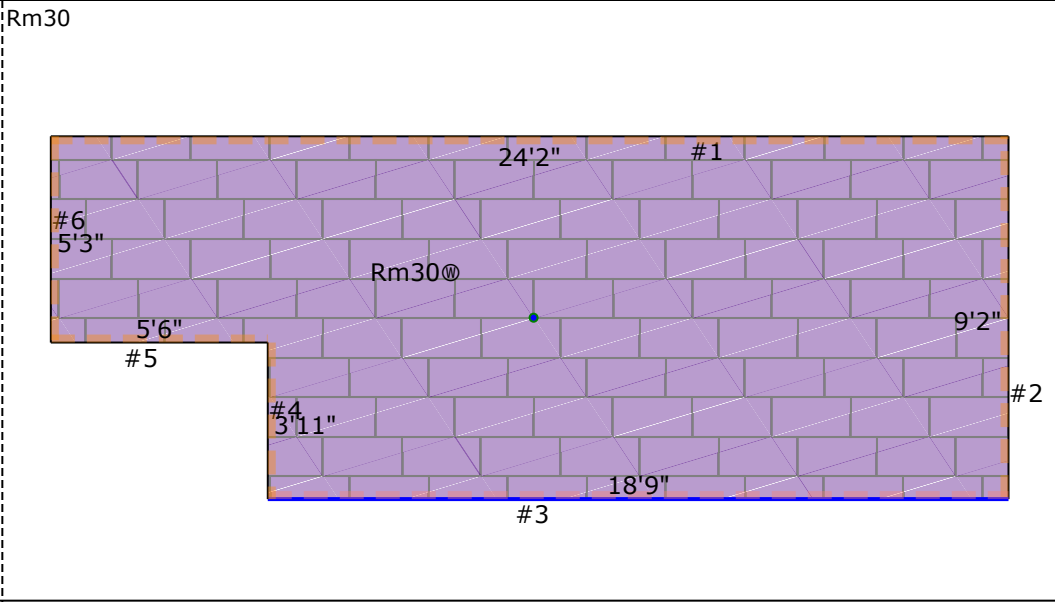

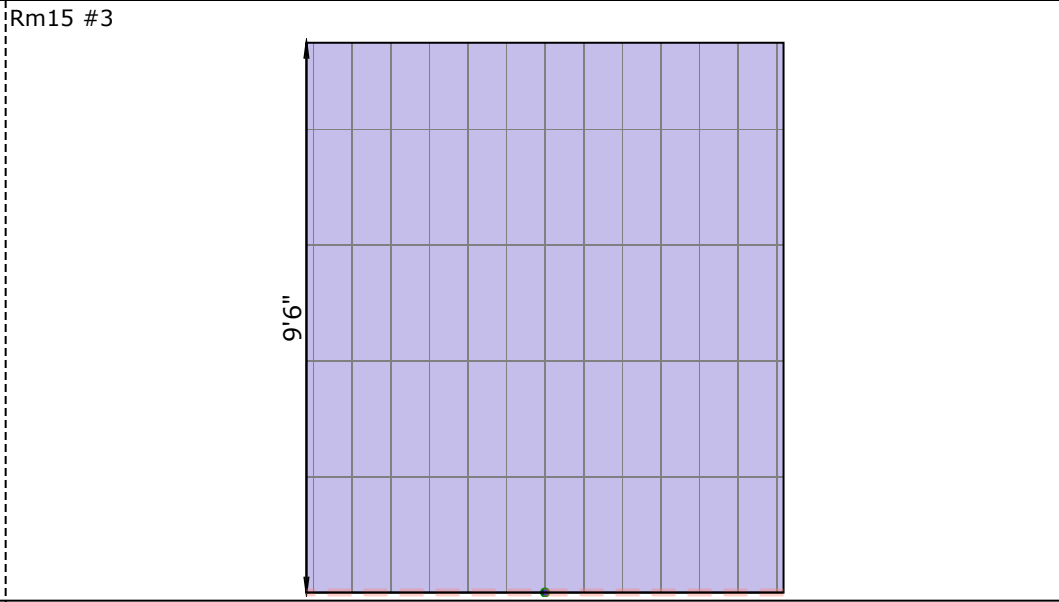


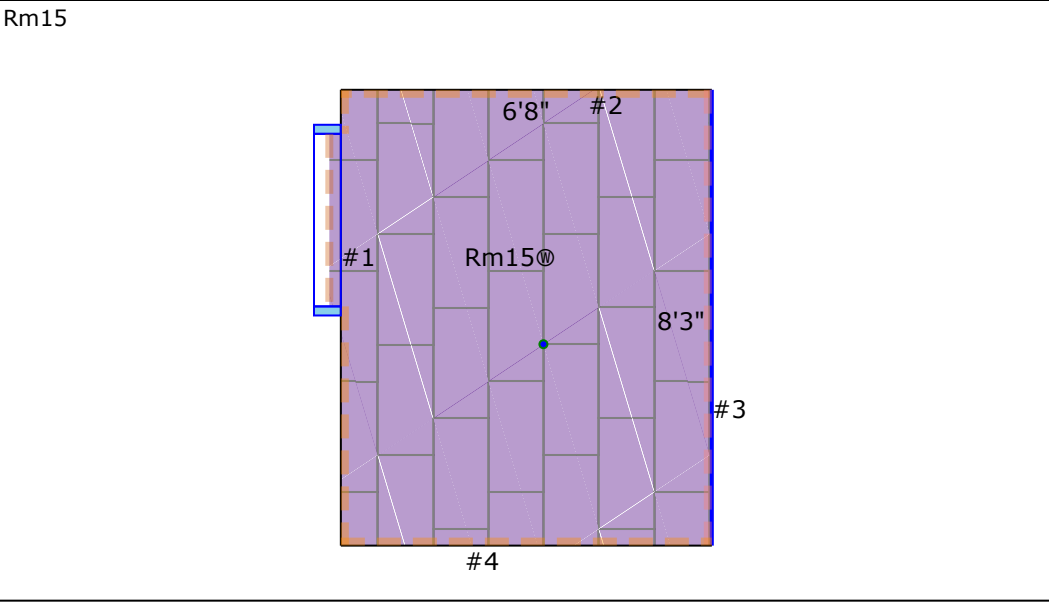


Rm59

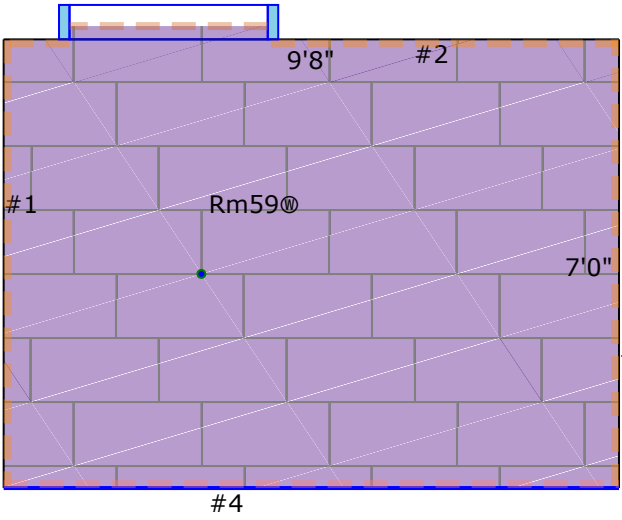

Rm59 #4

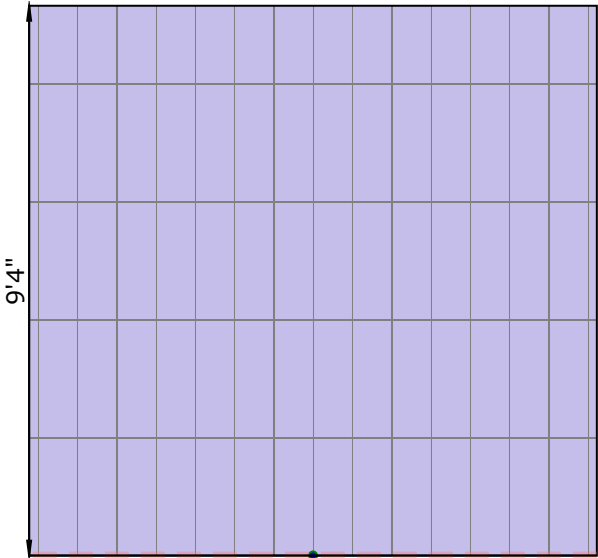

Rm60

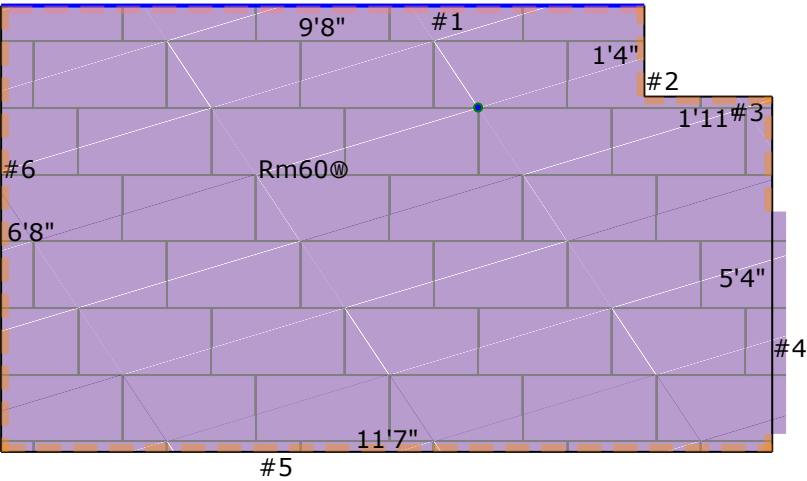

Rm60 #1

