



PRODUCT DESCRIPTION

Monograde mineral lubricant for all types of diesel engines, such as public works machinery, quarry machinery, buses, tractors, trucks, etc. Lubricant recommended for working under moderate service conditions and more frequent oil changes.

QUALITY LEVEL

API: CF / SF
 ALLISON C3
 CAT TO-2
 MAN 270
 MB 228.0
 MTU Type I

PRESENTATION

BULK
 1000 LTS.
 200 LTS.
 50 LTS.
 20 LTS.
 5 LTS.
 4 LTS.
 1 LT.



TECHNICAL PROPERTIES

trad_Propiedad	trad_Valor	valor	valor	valor	valor	valor
SAE GRADE	10W	30	40	50	60	70
VISCOSITY AT 100°C	4.5-5.6	9.3 - 12.5	12.5 - 16.3	16.3 - 21.9	21.9 - 26,1	26.1 - 27.5
VISCOSITY INDEX	110	110	110	110	110	110
FLASH POINT	210	220	230	210	230	230
FREEZING POINT	-31	-30	-30	-30	-28	-28
SULFATED ASH	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TBN	> 6.0	> 6.0	> 6.0	> 6.0	> 6.0	> 6.0






SAFETY AND HYGIENE TRANSLATED

Safety Data Sheets are available upon request and should be consulted for detailed information on the correct handling and use of the product. The company is not responsible for damages resulting from improper use or failure to comply with the indicated precautions and recommendations. — translated

IMPORTANT NOTE TRANSLATED

The information presented is based on current production data and may vary within specified tolerances. Temperature ranges are provided as guidance only. The information and data contained in this document may be modified without prior notice. This information replaces and voids all previous editions. — translated

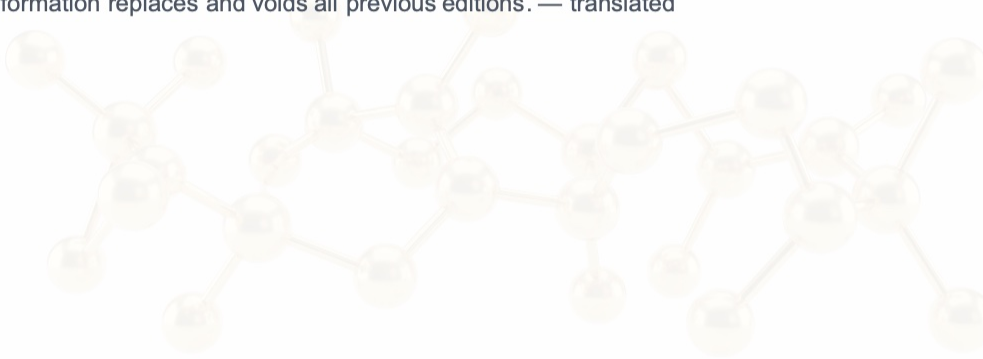

EELQMS
EUROPEAN ENGINE
LUBRICANTS QUALITY
MANAGEMENT SYSTEM

