



PRODUCT DESCRIPTION

A semi-synthetic oil designed to offer a high level of protection, cleanliness, and durability in passenger car and light and medium-duty commercial vehicle engines. Its advanced formulation combines premium quality bases with high-performance additives, ensuring optimal engine operation under any condition.

Applications

Gasoline and diesel engines

Passenger cars and light commercial vehicles

Use in urban driving, highway, and demanding conditions

Compatible with most automotive manufacturers

Key Benefits

Maximum wear protection

Significantly reduces engine wear, especially during cold start, by facilitating rapid oil circulation.

Superior engine cleanliness

Prevents sludge formation at low temperatures

Minimizes deposits at high temperatures

Keeps the engine clean and efficient

High thermal and oxidation stability

Extends lubricant life and allows optimized change intervals.

Stable viscosity in service

Excellent resistance to viscosity loss due to shear, ensuring constant lubrication throughout the usage cycle.

Optimized cold start

Adequate fluidity that improves protection at start-up, reducing initial engine wear.

Technical features

Semi-synthetic multigrade oil

High oxidation resistance

Excellent thermal stability

Advanced detergent and dispersant properties

Anti-corrosion and anti-wear protection



PRESENTATION

BULK	109181
1000 LTS.	100200
200 LTS.	100201
50 LTS.	100202
20 LTS.	100203
5 LTS.	100204
4 LTS.	106233
1 LT.	100205



QUALITY LEVEL

API:SN/CI-4
ACEA A3/B4
GM-LL B-025
Renault RN0700 / RN0710
VW 502.00/505.00
MB 229.1
FIAT 9.55535-G2

TECHNICAL PROPERTIES

trad_Propiedad	trad_Valor
SAE GRADE	10W-40
VISCOSITY AT 100°C	12,50 - 16,3
VISCOSITY AT -25°C	<7000
VISCOSITY INDEX	150
FLASH POINT	222
POUR POINT	-38
SULPHATED ASH	<1,6
TBN	>10,0



EELQMS
EUROPEAN ENGINE
LUBRICANTS QUALITY
MANAGEMENT SYSTEM




SAFETY AND HYGIENE TRANSLATED

Safety Data Sheets are available upon request and should be consulted for detailed information on the correct handling and use of the product. The company is not responsible for damages resulting from improper use or failure to comply with the indicated precautions and recommendations. — translated

IMPORTANT NOTE TRANSLATED

The information presented is based on current production data and may vary within the specified tolerances. Temperature ranges are provided as a guideline. The information and data contained in this document may be modified without prior notice. This information replaces and voids all previous editions. — translated

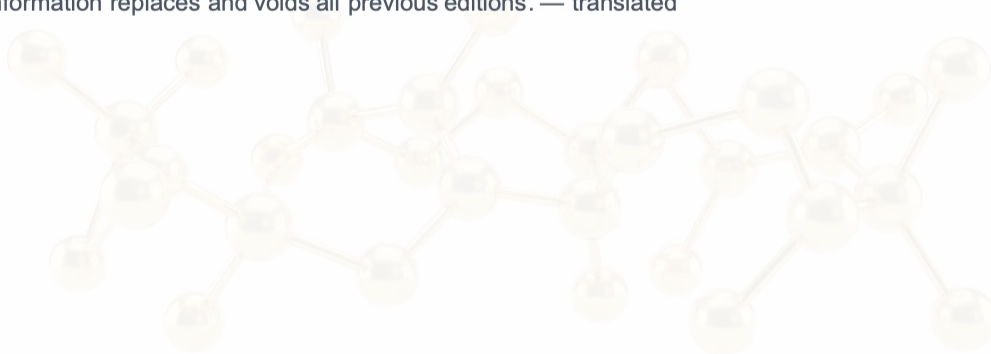

EELQMS
EUROPEAN ENGINE
LUBRICANTS QUALITY
MANAGEMENT SYSTEM

