ESE-DSL200 / ESE-DSL200S

Automatic Sliding Door System

ESE-DSL200 / ESE-DSL200S automatic sliding door operators offer reliable performance, smooth operation and intelligent control for a wide range of commercial and residential applications.




KEY FEATURES

- Intelligent control system, various parameters can be manually and flexibly adjusted on the controller according to selection, making operation more intelligent and efficient.
- DUNKER has a brush motor with high starting torque, smooth speed change, and low noise.
- Equipped with electric lock function, safe and reliable.
- The modern design unit utilizes globally trusted high-power motors and brand new mechanical components, with imported high-strength nylon suspension components. The unit has passed multiple tests.

APPLICATIONS

Suitable for offices, commercial buildings, hospitals, hotels, retail stores and other public entrances.

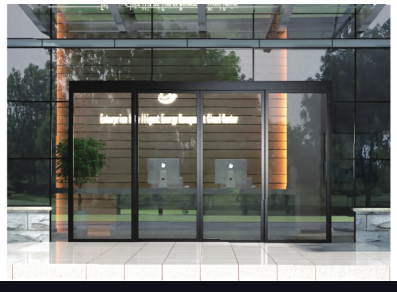

SAFE & RELIABLE
With electric lock function for enhanced security

SMOOTH OPERATION
High performance motor for stable and quiet movement

INTELLIGENT CONTROL
Flexible parameter settings for efficient operation


PREMIUM QUALITY
Global standard components with rigorous testing

TECHNICAL DATA


ESE-DSL200 (50W)	
Motor configuration:	DUNKER Motor 50W
Door form:	single door / double door
Door Leaf weight:	1x100kg / 2x100kg
Clean opening width:	700~2050mm / 1300~4100mm
Power supply:	AC 220V ± 10%, 50/60Hz
Dimensions:	145mm X 165mm (HxD)
Power consumption:	≤150W
Opening speed:	150~500mm/S (adjustable)
Closing speed:	150~500mm/S (adjustable)
Open time:	0~60S (adjustable)
Temperature range:	-20 ~ +50■

ESE-DSL200S (100W)	
Motor configuration:	DUNKER Motor 100W
Door form:	single door / double door
Door Leaf weight:	1x160kg / 2x160kg
Clean opening width:	700~2050mm / 1300~4100mm
Power supply:	AC 220V ± 10%, 50/60Hz
Dimensions:	145mm X 165mm (HxD)
Power consumption:	≤200W
Opening speed:	150~500mm/S (adjustable)
Closing speed:	150~500mm/S (adjustable)
Open time:	0~60S (adjustable)
Temperature range:	-20 ~ +50■

ACCESSORIES

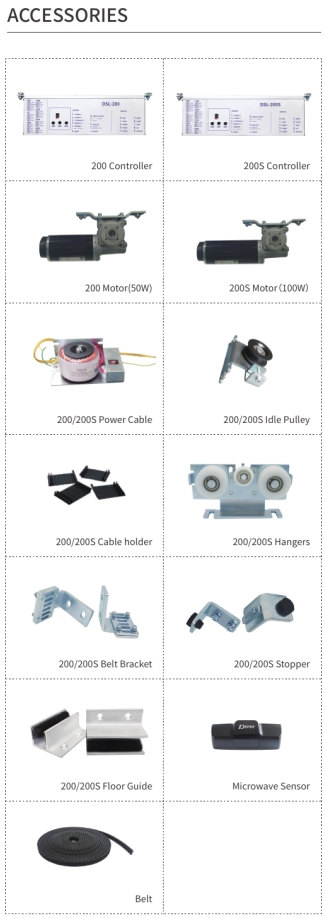

SECTIONAL VIEW

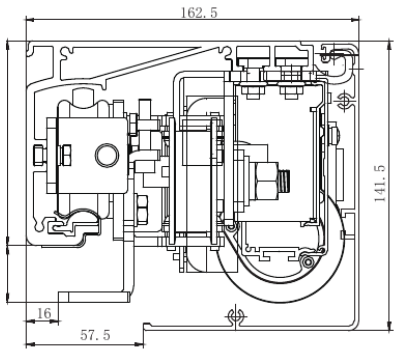

PRODUCT NOTE

Suitable for automatic sliding door installations requiring intelligent controller adjustment, stable DUNKER motor performance, and reliable operation for commercial and residential entrances.