

PRODUCT SPECIFICATION

43 Inch Touch monitor

MODEL --- HP-W430X


Specifications	Model number	Parameters
Display Parameters	LCD	BOE
	Backlight	E-LED
	Resolution	3840*2160
	Brightness (typ)	500 Nit
	Contrast ratio (typ)	4000:1
	Reaction time (typ)	< 6.5 ms
	Display size	941*530mm
	Frame frequency	60Hz
	Viewing Angle (min)	89/89/89/89 (CR≥10)
	Surface treatment method	Foggy surface (Haze2%), Hard coating (3H)
	Service Life	>50,000 hours
	Color saturation (x% NTSC)	68-72%
	Tint degree	16.7 M
Power Supply	Voltage	100-260 VAC, 50/60Hz
	Standby power	0.5 W or less
	Machine power (typ)/(max)	125w(typ)/150w(max), energy saving
Mechanical Characteristics	Scope Touch type	Multi-point projection capacitance touch screen
	Channel	RX:23 TX:41
	Power	5.0V
	Communication	USB
	Number of Touch point	10 points
	Supports operating systems	Windows/Android/Linux
Environment	Operating temperature	0°C ~ 40°C
	Storage temperature	-20°C ~ 60°C

	Operating humidity	20% ~ 80% RH Non-Condensing
	Storage humidity	5% to 90%
Motherboard Specifications	CPU	A73*4
	GPU	MALI-G520
	Android	Android 14.0
	DDR	4GB
	EMMC	32GB
	WIFI	Option
Port function	USB	USB2.0*5 USB3.0*1
	HDMI port (optional)	HDMI *2
	LINE OUT(optional)	LINE OUT
	SPDIF-OUT	*1
	RJ45	*1
	LINE-IN	*1
	TOUCH-OUT	*2
	RS232	*1
	TYPE-C	*1
	HDMI-IN	*1
Other features	Internal horn	5W*2
	Power (AC) input	* 1
Structure	Net weight	17KG / 1 PCS
	Gross weight	20KG/1PCS
	Dimensions of the bare machine	982*571*69mm (without pylon)
	Package size (W x D x H)	1090*715*165mm
	Shell material (face frame/back shell)	Aviation aluminum profile face frame/sheet metal small rear shell, full hardware body
	Shell color (face frame/rear shell)	Black/support for customization
Accessories	Remote control	*1 (provided according to motherboard)
	Power cord	* 1
	Certificate of conformity	* 1
	Instructions	*1 (provided according to motherboard)
	Warranty card	* 1

Certification

ISO9001,CE,SGS,CCC,CQC,ROHS

43 OD电容OPS款

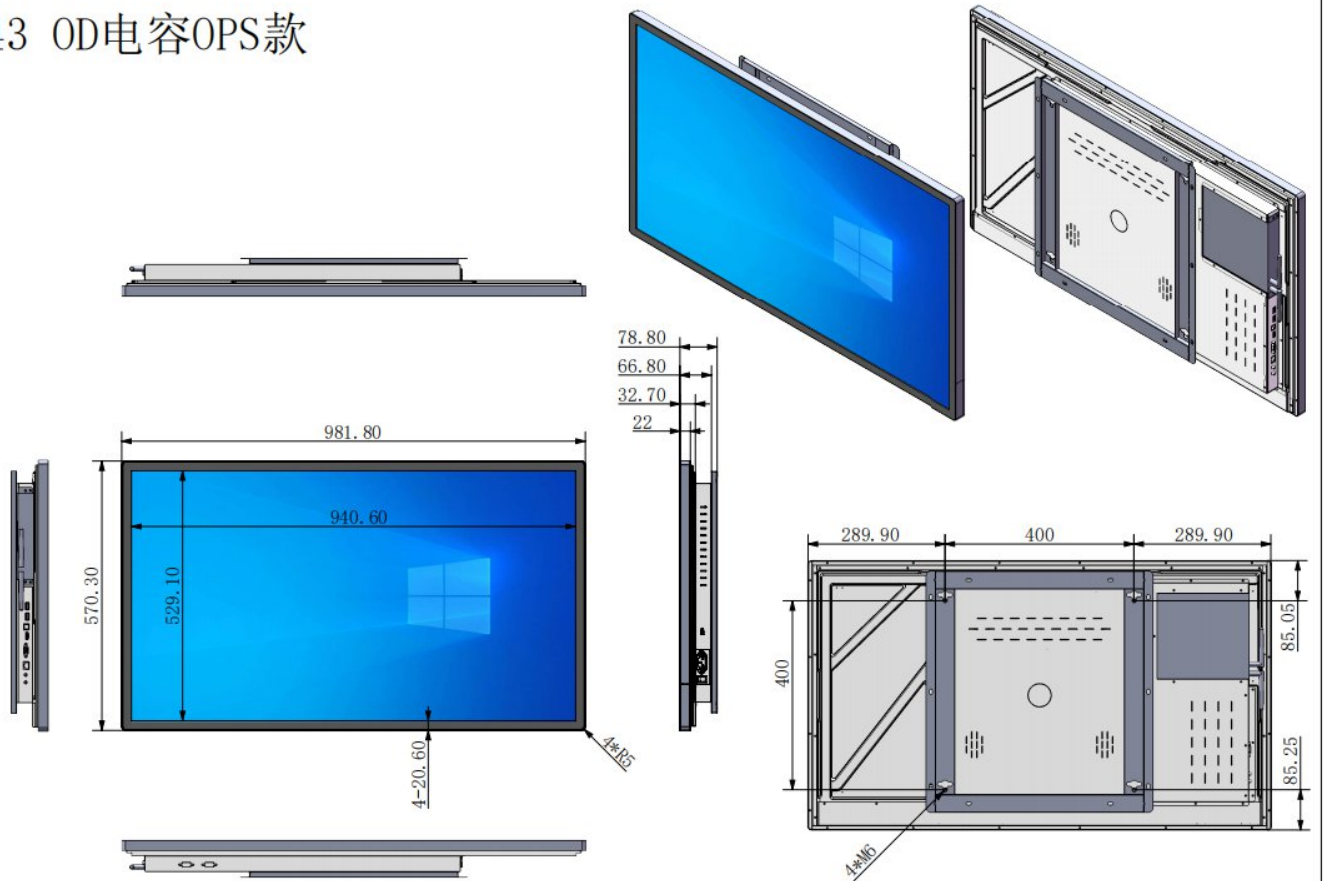

单位: mm

