



Title： OTL223-RC3A00-UC2F00-1.0


Mark	Revised Contents	Signature
1		

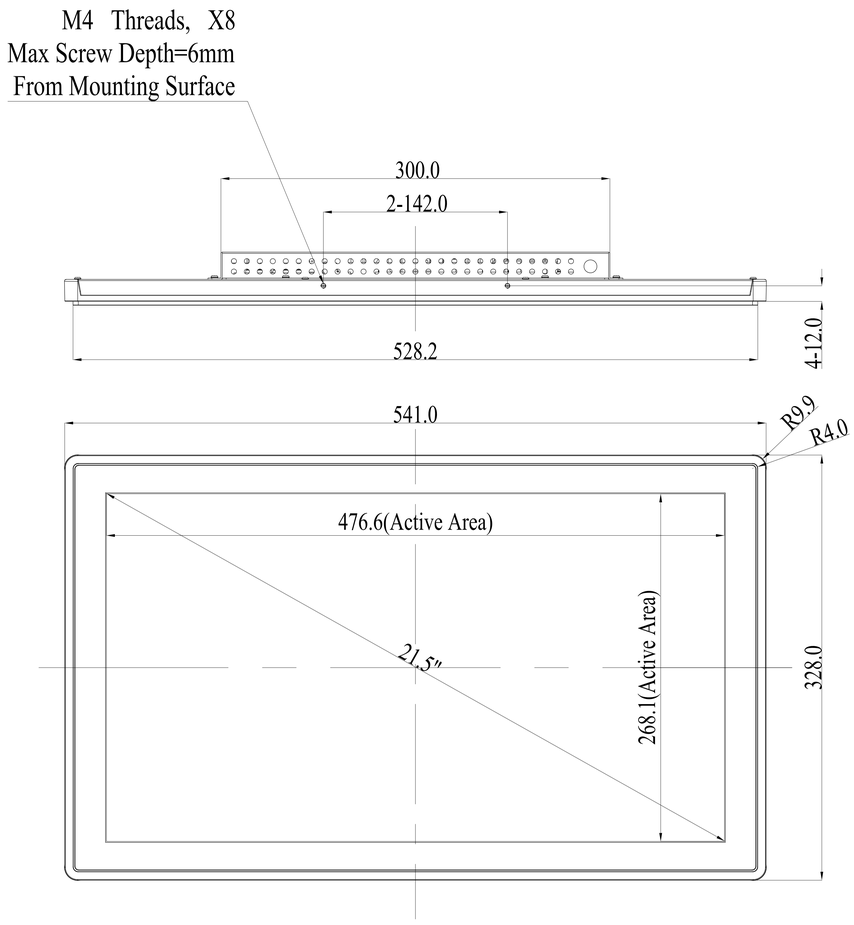

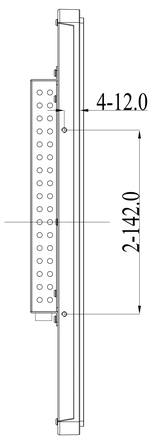

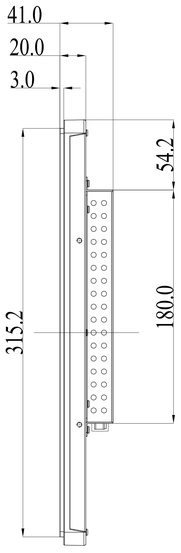

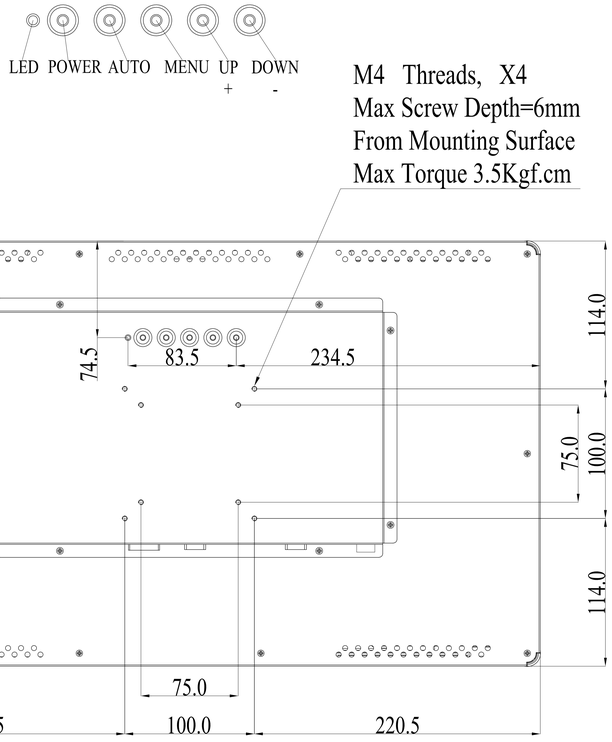

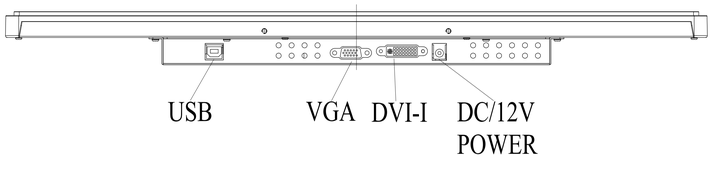


To ensure the service life of the whole machine.
1.Plastic parts should not be exposed to grease, acid or strong light for a long time.
2.The temperature of plastic parts must be lower than 80 ℃, and there is a risk of softening and deformation when the temperature exceeds 80 ℃;
3.The sheet metal parts shall not be exposed to acidic substances;
4.After stamping and cutting, the section of sheet metal parts is lack of zinc coating protection, and there will be rust.


ALL DIMENSIONS ARE IN MILLIMETERS


GENERAL Touch	GeneralTouch Co.,Ltd.						
Specfication		External Dimensions	541*328*41	Anti-Glare	Y☐ N☑		Designer:
Unit	Date	Active Area	476.6*268.1	DustPro	Y☐ N☑		
mm	2021/09/30	Glass Thickness	1.1mm				Zhou Rui
Projection:		Silk Print Color	Black				
		Mounting	Vesa ☑	Bracket ☐			Checked By:
Sheet 1 of 2		Notes					Wang Zhenghua
VER: 0.2	Scale: 1:1	Touch Technology	P-CAP	√	SAW		Approved By:
Tolerance: ±1.0mm			IR/PIT		Resistive		
			Non-Touch				Zhou Bolin


Title： OTL223-RC3A00-UC2F00-1.0


Mark	Revised Contents	Signature
1		

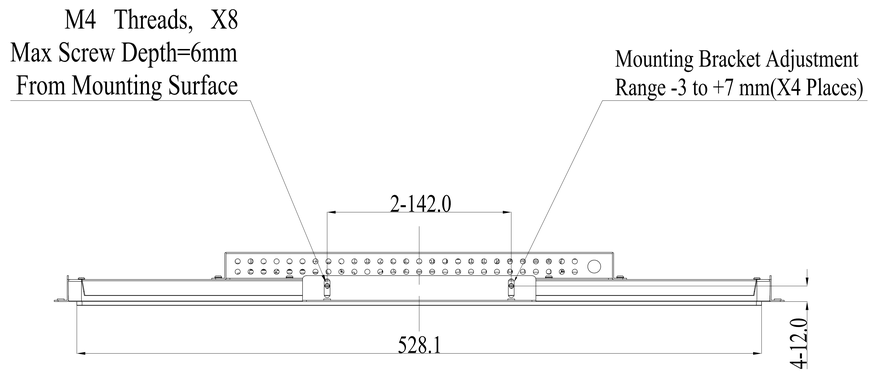

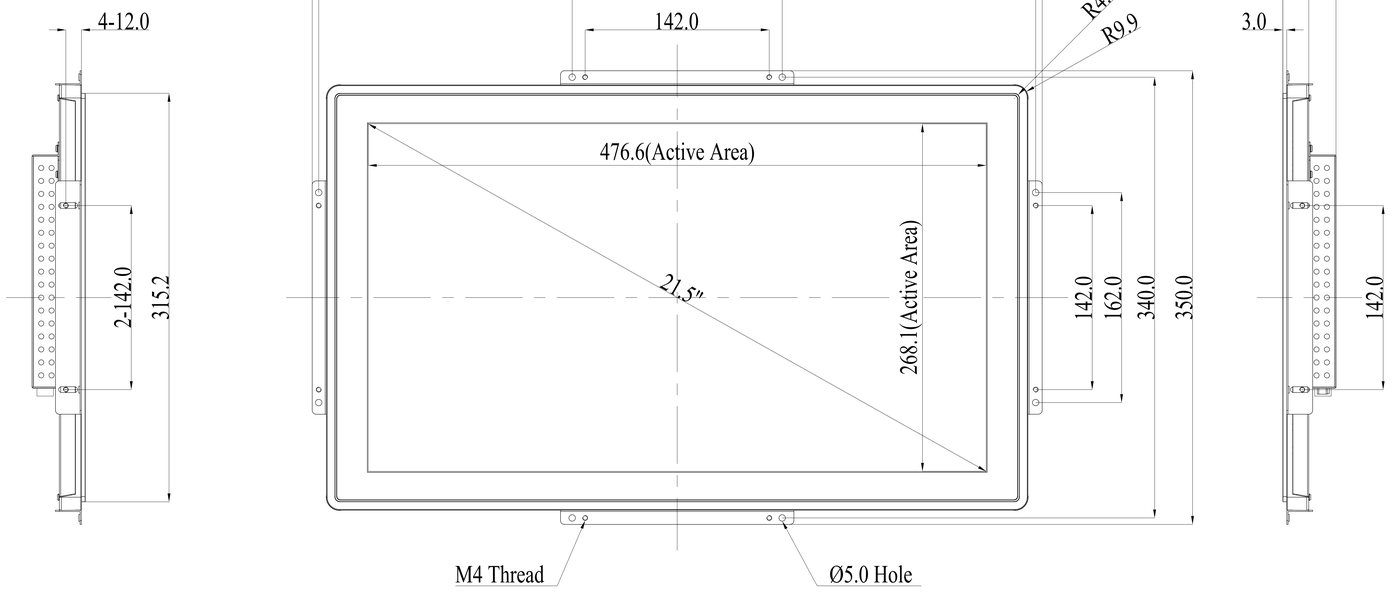

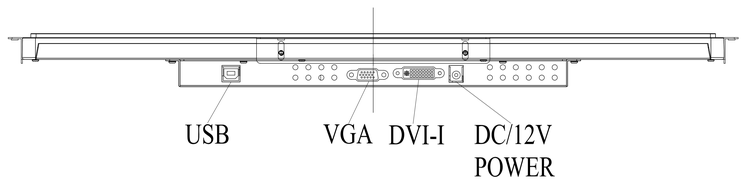



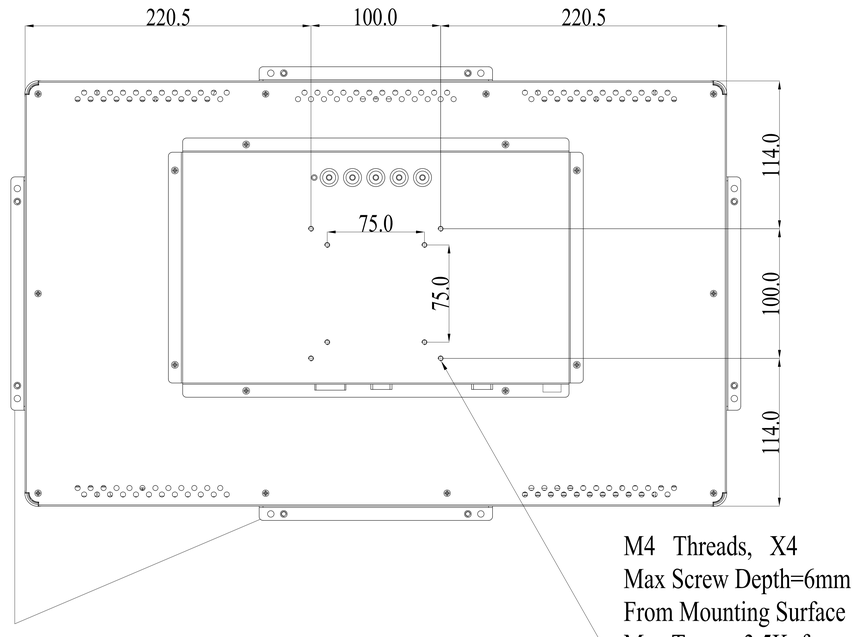

Only one pair of brackets will be provided as default configuration and shipped as accessories but not assembled on the monitor. You can confirm the assembly location according to your application.
If more brackets are needed, please contact our sales before placing the order.

To ensure the service life of the whole machine.
1.Plastic parts should not be exposed to grease, acid or strong light for a long time.
2.The temperature of plastic parts must be lower than 80 ℃, and there is a risk of softening and deformation when the temperature exceeds 80 ℃;
3.The sheet metal parts shall not be exposed to acidic substances;
4.After stamping and cutting, the section of sheet metal parts is lack of zinc coating protection, and there will be rust.

ALL DIMENSIONS ARE IN MILLIMETERS

GeneralTouch Co.,Ltd.

Specfication		External Dimensions	563*350*41	Anti-Glare	Y☐ N☑	Designer:
Unit	Date	Active Area	476.6*268.1	DustPro	Y☐ N☑	
mm	2021/09/30	Glass Thickness	1.1mm			Zhou Rui
Projection:		Silk Print Color	Black			
		Mounting	Vesa ☑	Bracket ☑		Checked By:
Sheet 2 of 2		Notes				Wang Zhenghua
VER: 0.2	Scale: 1:1	Touch Technology	P-CAP	√	SAW	Approved By:
Tolerance: ±1.0mm			IR/PIT		Resistive	
			Non-Touch			Zhou Bolin