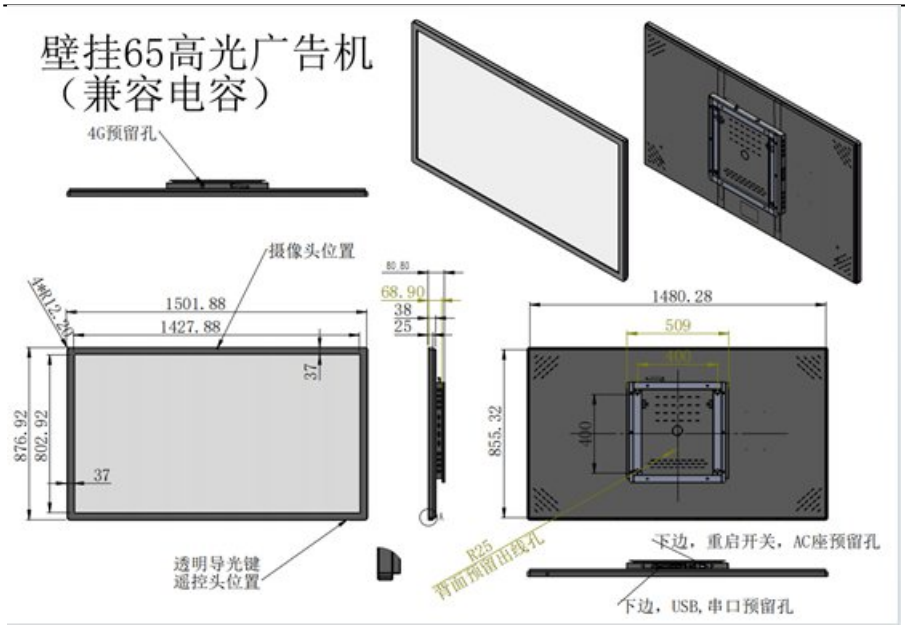
PRODUCT SPECIFICATION

65 Inch Touch monitor

Specifications	Model number	Parameters
Display parameters	LCD	BOE
	Backlight	E-LED
	Resolution	3840*2160
	Brightness (typ)	500 Nit
	Contrast ratio (typ)	4000:1
	Reaction time (typ)	< 6.5 ms
	Display size	Look at below drawings
	Frame frequency	60Hz
	Viewing Angle (min)	89/89/89/89 (CR≥10)
	Surface treatment method	Foggy surface (Haze2%), Hard coating (3H)
	Service Life	>50,000 hours
	Color saturation (x% NTSC)	68-72%
	Tint degree	16.7 M
Power supply	Voltage	100-260 VAC, 50/60Hz
	Standby power	0.5 W or less
	Machine power (typ)/(max)	145w(typ)/170w(max),
Mechanical Characteristics	Scope Touch type	Multi-point projection Capacitance touch screen
	Channel	RX:23 TX:41
	Power	5.0V
	Communication	USB
	Number of Touch point	10 points
	Supports operating systems	Windows/Android/Linux
Environment	Operating temperature	0℃ ~ 40℃
	Storage temperature	-20℃ ~ 60℃
	Operating humidity	20% ~ 80% RH Non-Condensing
	Storage humidity	5% to 90%
Motherboard Specifications	CPU	A73*4
	GPU	MALI-G520

	Android	Android 14.0
	DDR	4GB
	EMMC	32GB
	WIFI	5G, 2.4G+BT5.0
Port function	USB	USB2.0*5 USB3.0*1
	HDMI port (optional)	HDMI *2
	LINE OUT(optional)	LINE OUT
	SPDIF-OUT	*1
	RJ45	*1
	LINE-IN	*1
	TOUCH-OUT	*2
	RS232	*1
	TYPE-C	*1
	HDMI-IN	*1
Other features	Internal horn	5W*2
	Power (AC) input	* 1
Structure	Net weight	31KG / 1 PCS
	Gross weight	35KG/1PCS
	Dimensions of the bare machine	Look at drawings
	Package size (W x D x H)	1660*800*168mm
	Shell material (face frame/back shell)	Aviation aluminum profile face frame/sheet metal small rear shell, full hardware body
	Shell color (face frame/rear shell)	Black/support for customization
Accessories	Remote control	*1 (provided according to motherboard)
	Power cord	* 1
	Certificate of conformity	* 1
	Instructions	*1 (provided according to motherboard)
	Warranty card	* 1
Certification	ISO9001,CE,SGS,CCC,CQC,, ROHS	


壁挂65高光广告机
（兼容电容）
4G预留孔
摄像头位置
4-M12-200
1501.88
1427.88
876.92
802.92
37
37
透明导光键
遥控头位置
80.80
68.90
38
25
R25
背面预留出线孔
1480.28
509
400
400
855.32
下边，重启开关，AC座预留孔
下边，USB,串口预留孔