WHOLE-HOME SOFTENING + CARBON FILTRATION

ClarityShield Dual Tank System


One softening tank removes the minerals that cause scale. One carbon tank reduces chlorine taste and odor. Together they treat every tap in the home.

48,000
Grain softening capacity (rated)

27 GPM*
Manufacturer-rated system flow

10%
Crosslink resin, 1.5 cu ft

10 years
Warranty on tanks & dry parts

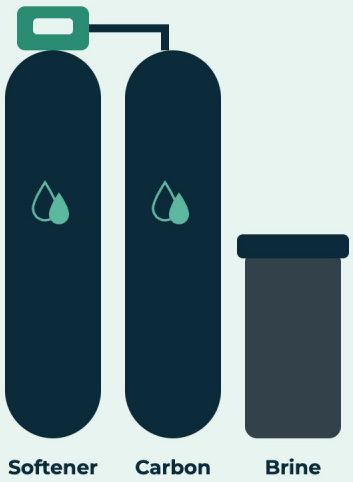

SPECIFICATIONS

System type	**Softener + whole-home carbon filter**
Softening capacity	**48,000 grains (rated max.)**
Resin	**1.5 cu ft · 10% crosslink cation**
Carbon media	**Coconut-shell GAC**
Media tanks	**Two, 10" × 54" each**
Brine / salt tank	**15" × 35", square**
Flow rate*	**27 GPM system · 30 GPM valve**
Connection / bypass	**1"**
Regeneration	**Automatic, overnight**

*Manufacturer ratings. Actual flow depends on home plumbing and water pressure.

WHAT'S INSIDE

1. **Digital control valve**
   Hankscraft valve with ceramic discs, simple programming and a 72-hour memory backup.
2. **Softening tank**
   High-capacity resin removes calcium and magnesium, on a gravel base that keeps flow even.
3. **Carbon tank**
   Coconut-shell carbon reduces chlorine taste and odor at every tap in the home.
4. **Brine tank**
   Holds the salt that recharges the resin. Topping up salt is the only routine homeowner task.

COMPONENT CERTIFICATIONS

Verify any listing at info.nsf.org/Certified

Control valve	Mineral tanks	Softening resin	Support gravel	Carbon media
NSF/ANSI 44 component	NSF/ANSI 44 component	WQA Gold Seal, NSF 44/61/372	NSF/ANSI 61	NSF/ANSI 61

Certifications apply to individual components, not to the assembled system.