


ABCD - VOLNAY - UV OIL
A15135

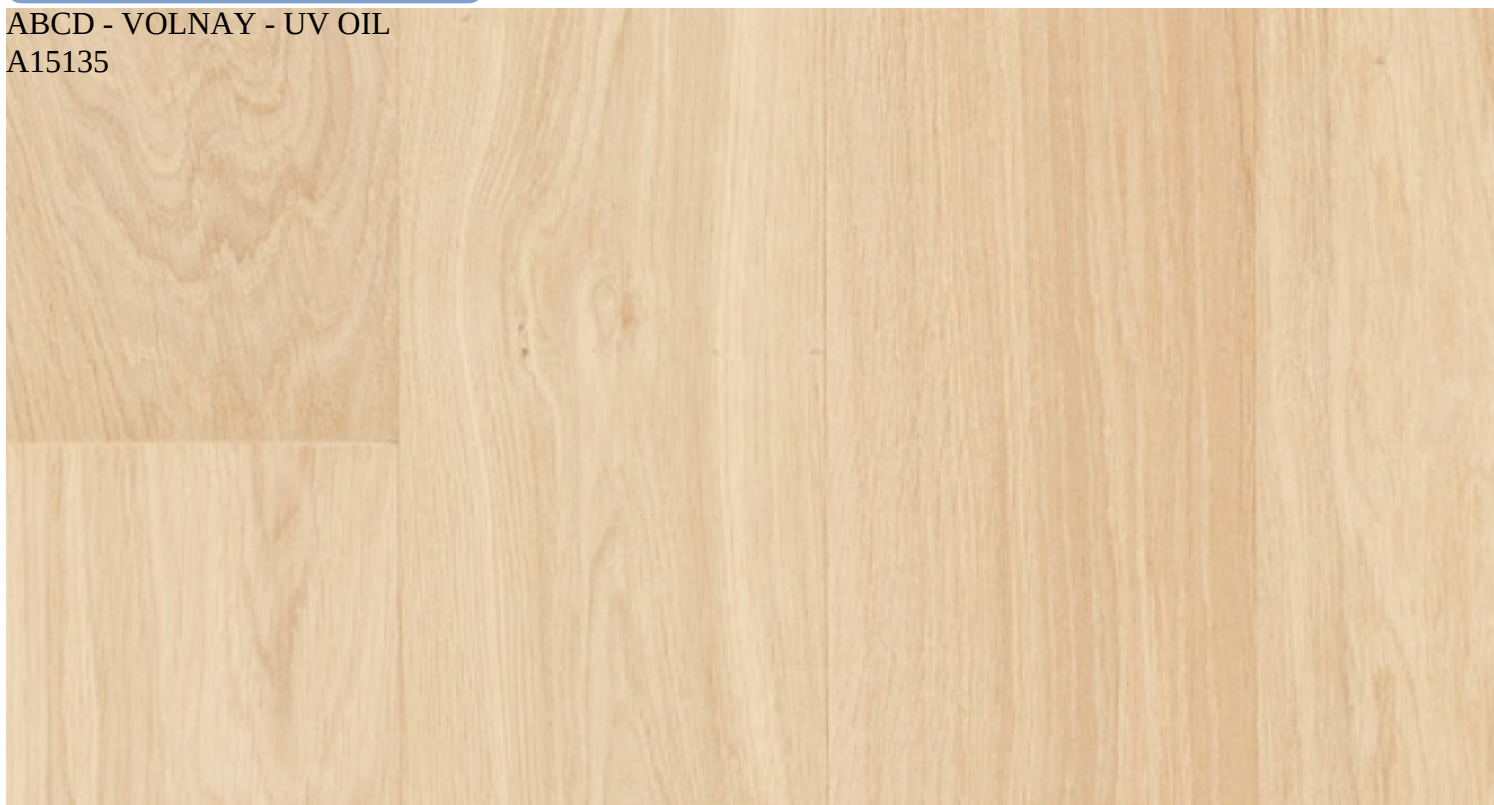

Dimension board

Length	2200mm
Width	180mm
Total thickness	14.0mm
Thickness top layer	3mm
Layer contents	Min 3 Pl x 2200 mm

Dimension pack

Pack length	2250mm
Pack width	185mm
Pack thickness	84mm
Pack weight	23kg
Layers/box	6
m ² /pack	2.38m ²

Dimension pallet

Pallet length	2250mm
Pallet width	95mm
Pallet height	1100mm
Pallet weight	1280kg
Packs/pallet	55
m ² /pallet	130.90m ²
Characteristics	

Top layer

Wood species	Oak
--------------	-----

Latin name	ABCD VOLNAY Quercus Robur
Grade	A15135 ABCD
Construction	2-layer
Thickness top layer	3mm
Pattern	1 strip
Cutting method	Zaagfineer
Bevel	Bevel 4 long sides 0,75 mm
Finish	UV Oil
Surface structure	Smooth

Composition of the support

Support type	Populier
Wood species support	Populier
Total thickness support	11mm
Adhesion	Kruiselings

Installation

System
Tongue and groove
Applications

Light household use.
Moderate commercial use.
Normal commercial use.
Normal household use.
Intensive commercial use.

Underfloor heating

Yes
Re-sandable
Yes

ABCD VOLNAY - UV OIL

Technical specifications

	Norm	Result
Reaction to fire	EN 13501-1	Dfl-S1
Formaldehyde emission	EN 717-1	E1
PCP	CEN/TR 14823	? 5ppm
Thermal conductivity	EN 12667 / ISO 8302	0,11m² k/w
Biological durability	EN 335	Class 1
Breaking strength	EN 1533	Pass
Slipperiness	EN 15676	Pass
Moisture content	EN 13183-1	7% (+/-2%)

Certification



EN 14342

