

Switching Power Supply Manual K80

Wide input voltage range, small size, high reliability, electromagnetic compatibility, and high efficiency, perfect protection, with remote control to open the door, the temperature rise of electric locking (when compared with power-frequency) greatly reduced.

Characteristics:

Input voltage: 110 ~ 240V AC;

Input frequency: 50 ~ 60Hz;

Output voltage: DC12V;

Output Current: 3A;

Fan fine-tune the output voltage $\pm 10\% \sim \pm 15\%$;

Load stability: 1% typical;

Output stability: 0.5% typical;

Ripple and noise: 1%, peak-to-peak (100mVp-p typical)

Dielectric strength: primary / sub-polar inter-1500V AC,

primary / shell inter-1500V AC, at a very / shell inter-500V AC;

Hold time: when the typical

full-load value is 20ms;


Working ambient temperature: $-20 \sim +65^{\circ}\text{C}$;

Overload protection: All outputs have short circuit protection when overloaded;

Outside the steel Size: 120mm $\times$ 95mm $\times$ 38mm

Weight: 250g

Output wiring diagram:

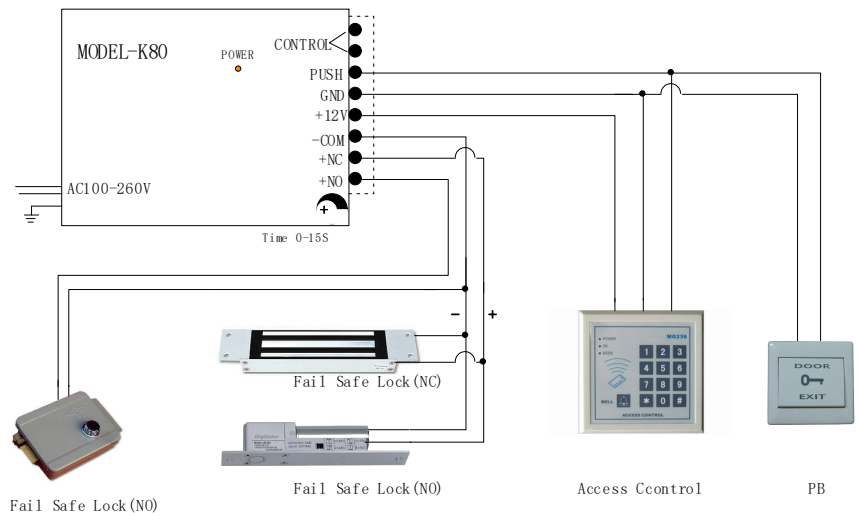

Attention!

Electronic access is necessary to open the door lock when the time to 0 seconds, electric control lock to prevent burning.

Switching Power Supply Manual K80

Wide input voltage range, small size, high reliability, electromagnetic compatibility, and high efficiency, perfect protection, with remote control to open the door, the temperature rise of electric locking (when compared with power-frequency) greatly reduced.

Characteristics:

Input voltage: 110 ~ 240V AC;

Input frequency: 50 ~ 60Hz;

Output voltage: DC12V;

Output Current: 3A;

Fan fine-tune the output voltage $\pm 10\% \sim \pm 15\%$;

Load stability: 1% typical;

Output stability: 0.5% typical;

Ripple and noise: 1%, peak-to-peak (100mVp-p typical)

Dielectric strength: primary / sub-polar inter-1500V AC,

primary / shell inter-1500V AC, at a very / shell inter-500V AC;

Hold time: when the typical full-load value is 20ms;


Working ambient temperature: $-20 \sim +65^{\circ}\text{C}$;

Overload protection: All outputs have short circuit protection when overloaded;

Outside the steel Size: 120mm $\times$ 95mm $\times$ 38mm

Weight: 250g

Output wiring diagram:

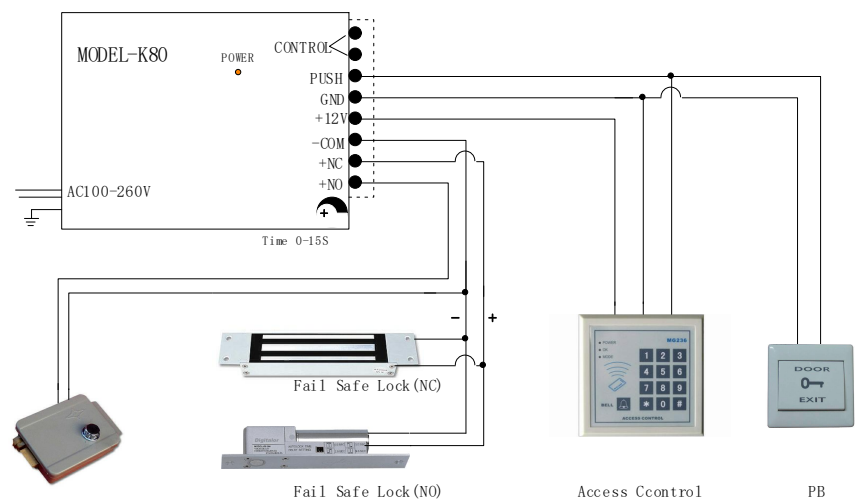

Attention!

Electronic access is necessary to open the door lock when the time to 0 seconds, electric control lock to prevent burning.