


hydraBOND® Automotive Attachment Acrylic Tape
Cinta Acrílica De Fijación Automotriz hydraBOND®
Ruban Acrylique De Fixation Automobile hydraBOND®



hydraBOND® Automotive Attachment Acrylic Tape Is A Gray 1.1 Mil Thick Double Sided Closed Cell Pressure Sensitive Acrylic Foamtape.

hydraBOND® Automotive Attachment Acrylic Tape Also Offers An Extremely Powerful Longterm Holding Capability, Resists UV Light, Extreme Temperatures & Offers Weather Sealing Abilities

hydraBOND® Automotive Attachment Acrylic Tape Is Often Used In The Automotive Aftermarket Industry As Well As A Wide Variety Of Applications.

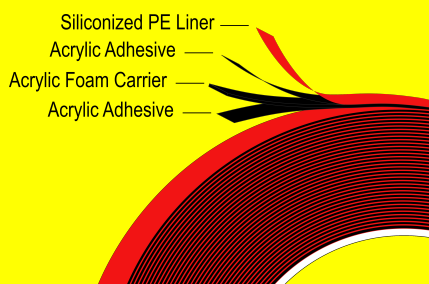

TECHNICAL DESCRIPTIONS	UNIT	VALUE
BACKING		FOAM-LIKE ACRYLIC GLUE
COLOUR		GRAY
ADHESIVE		SOLVENT ACRYLIC
THICKNESS		MM 1.1
ELONGATION	%	750 +/- 100

90° PEEL ADHESION		(ASTM D-3330)
AFTER 20 MINUTES	GR.F./25MM	7,000
AFTER 24 HOURS	GR.F./25MM	8,000
AFTER 72 HOURS	GR.F./25MM	10,000

TENSILE STRENGTH		(ASTM D-897)
(50MM/MIN., 25MMX25M)	KGF/25×25mm ²	45

DYNAMIC SHEAR		(ASTM D-1002)
(50MM/MIN, 25MM X 25M)		
SUS-304	KGF/25×25mm ²	55
PVC PLATE	KGF/25×25mm ²	55
ABS PLATE	KGF/25×25mm ²	55

STATIC SHEAR		(ASTM D-3654)
(25MM X 25MM, OVER 10,000 MIN.)	110°C	1,000G

SERVICE TEMPERATURE		
MINIMUM	°C	20
MAXIMUM	°C	180

UNLESS OTHERWISE STATED, ALL OF THE ABOVE FIGURES ARE AVERAGE VALUES.

TEST METHOD: ASTM

See page# 2 for Application instructions

⚠ WARNING! THIS PRODUCT CAN EXPOSE YOU TO CHEMICALS INCLUDING BENZENE (CAS n° 71-43-2), WHICH IS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM. FOR MORE INFORMATION GO TO www.P65warnings.ca.gov.

NOTE! ALL OUR PRODUCTS SHOULD BE THOROUGHLY TESTED BY THE CLIENT ON THE SUBSTRATES BEING USED IN THEIR OWN APPLICATIONS. BHG IMPORT EXPORT INC. CAN NOT BE HELD RESPONSIBLE FOR PRODUCT FAILURE UNLESS FULL TESTING HAS BEEN CARRIED OUT. THE CLIENT HAS TO DECIDE ON THE TAPES SUITABILITY FOR THEIR OWN APPLICATIONS.



hydraBOND® Automotive Attachment Acrylic Tape Cinta Acrílica De Fijación Automotriz hydraBOND® Ruban Acrylique De Fixation Automobile hydraBOND®



Apply **CB+Plus Automotive Adhesion Promoter** HB6711, HB6674, or HB6681 to the back side of all plastic trim prior to tape application. **Scan QR code**



hydraBOND® Automotive Attachment Acrylic Tape

Note: Surfaces should be at least 16°C (60°F).

Suggested Repair Procedure:

1. Remove previous tape from part and vehicle.
2. Clean part and vehicle with General Purpose Cleaner and then with isopropyl alcohol.
3. Apply CB+Plus Automotive Adhesion Promoter HB6711 to the back side of all plastic trim prior to tape application.
4. Apply hydraBOND® attachment tape to part. Remove release liner, being careful not to touch or contaminate the surface of the exposed adhesive.
5. Firmly roll down or rub down part to reattach to vehicle.

NOTE: Refer to the manufacturer's SDS when handling solvents, cleaners, chemicals, etc.

hydraBOND® warrants that each hydraBOND® product meets the applicable hydraBOND® product specification at the time hydraBOND® ships the product. hydraBOND® MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If the hydraBOND® product does not conform to this warranty, the sole and exclusive remedy is, at hydraBOND®'s option, replacement of the hydraBOND® product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, hydraBOND® will not be liable for any loss or damage arising from the hydraBOND® product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted. Limitation of Liability: Except where prohibited by law, hydraBOND® will not be liable for any loss or damage arising from the hydraBOND® product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

hydraBOND® is a registered trademark of BHG Import Export Inc.

www.hydrabond.com/automotive-attachment-acrylic-tape
Made exclusively for hydraBOND®
hydraBOND® 2022 .All rights reserved.

Cinta acrílica de fijación automotriz hydraBOND®

Nota: las superficies deben tener al menos 16 °C (60 °F).

Procedimiento de reparación sugerido:

1. Retire la cinta anterior de la pieza y el vehículo.
2. Limpie la pieza y el vehículo con un limpiador de uso general y luego con alcohol isopropílico.
3. Aplique el promotor de adhesión automotriz CB+Plus HB6711 en la parte posterior de todas las molduras de plástico antes de aplicar la cinta.
4. Aplique la cinta de fijación hydraBOND® a la pieza. Retire el revestimiento desprendible, teniendo cuidado de no tocar ni contaminar la superficie del adhesivo expuesto.
5. Ruede firmemente hacia abajo o frote la pieza para volver a colocarla en el vehículo.

NOTA: Consulte la SDS del fabricante cuando manipule solventes, limpiadores, productos químicos, etc.

hydraBOND® garantiza que cada producto hydraBOND® cumple con la especificación de producto hydraBOND® aplicable en el momento en que hydraBOND® envía el producto. hydraBOND® NO OFRECE OTRAS GARANTÍAS O CONDICIONES EXPLÍCITAS O IMPLÍCITAS, INCLUYENDO CUALQUIER GARANTÍA IMPLÍCITA O CONDICIÓN DE COMERCIABILIDAD O IDONEIDAD PARA UN FIN DETERMINADO. Si el producto hydraBOND® no cumple con esta garantía, el único y exclusivo recurso es, a opción de hydraBOND®, el reemplazo del producto hydraBOND® o el reembolso del precio de compra.

Limitación de responsabilidad: excepto donde lo prohíba la ley, hydraBOND® no será responsable de ninguna pérdida o daño que surja del producto hydraBOND®, ya sea directo, indirecto, especial, incidentales o consecuentes, independientemente de la teoría legal afirmada. Limitación de responsabilidad: Excepto donde lo prohíba la ley, hydraBOND® no será responsable de ninguna pérdida o daño que surja del producto hydraBOND®, ya sea directo, indirecto, especial, incidental o consecuente, independientemente de la teoría legal afirmada.

hydraBOND® es una marca registrada de BHG Import Export Inc.

www.hydrabond.com/automotive-attachment-acrylic-tape
Hecho exclusivamente para hydraBOND®
hydraBOND® 2022. Todos los derechos reservados.

Ruban acrylique de fixation automobile hydraBOND®

Remarque : Les surfaces doivent être à au moins 16 °C (60 °F).

Procédure de réparation suggérée :

1. Retirez le ruban adhésif précédent de la pièce et du véhicule.
2. Nettoyez la pièce et le véhicule avec un nettoyant à usage général, puis avec de l'alcool isopropylique.
3. Appliquez le promoteur d'adhérence automobile CB+Plus HB6711 à l'arrière de toutes les garnitures en plastique avant l'application du ruban.
4. Appliquez le ruban de fixation hydraBOND® sur la pièce. Retirez la pellicule antiadhésive en faisant attention de ne pas toucher ou contaminer la surface de l'adhésif exposé.
5. Rouler ou frotter fermement la pièce pour la rattacher au véhicule.

REMARQUE : Reportez-vous à la fiche de données de sécurité du fabricant lors de la manipulation de solvants, de nettoyants, de produits chimiques, etc.

hydraBOND® garantit que chaque produit hydraBOND® est conforme aux spécifications de produit hydraBOND® applicables au moment où hydraBOND® expédie le produit. hydraBOND® N'OFFRE AUCUNE AUTRE GARANTIE OU CONDITION EXPRESSE OU IMPLICITE, Y COMPRIS TOUTE GARANTIE IMPLICITE OU CONDITION DE QUALITÉ MARCHANDE OU D'ADAPTATION À UN USAGE PARTICULIER. Si le produit hydraBOND® n'est pas conforme à cette garantie, le seul et unique recours est, au choix d'hydraBOND®, le remplacement du produit hydraBOND® ou le remboursement du prix d'achat.

Limitation de responsabilité : Sauf là où la loi l'interdit, hydraBOND® ne sera pas responsable de toute perte ou dommage résultant du produit hydraBOND®, qu'il soit direct, indirect, spécial, accessoire ou consécutif, quelle que soit la théorie juridique affirmée. Limitation de responsabilité : Sauf là où la loi l'interdit, hydraBOND® ne sera pas responsable de toute perte ou dommage résultant du produit hydraBOND®, qu'il soit direct, indirect, spécial, accessoire ou consécutif, quelle que soit la théorie juridique invoquée.

hydraBOND® est une marque déposée de BHG Import Export Inc.

www.hydrabond.com/automotive-attachment-acrylic-tape
Fabriqué exclusivement pour hydraBOND®
hydraBOND® 2022. Tous droits réservés.