AIREY-THOMPSON®
Manufacturing Quality Luminaires

- PROJECT
- FIXTURE TYPE
- MODEL #

81L-NA VAPOR TIGHT

SPECIFICATION SHEET

OVERVIEW

The 81L-NA is a linear IP-65 rated vapor tight perfect for any wet location or warehouse areas. 5 Selectable lumen outputs and 5 selectable CCT. Stainless steel lens clips standard.

KEY FEATURES

- Selectable power
  25/30/35/40/50W selectable
- CCT Selectable
  27/35/40/50/57K selectable
- ETL and DLC Listed
  Certification/ Rating
- <3SDMC consistency
  Uniform color consistency
- 120 Lumens per watt
  Efficient performance delivered

DETAILS

01 **Housing**
Gray polycarbonate housing, 100% impact modified.
Frosted smooth polycarbonate lens. Stainless steel latches.

02 **Electrical**
Integral 120/277V FCC driver standard. If 0-10V dimming is specified 100-1% is standard. Integral battery backups are also available.

03 **LED Array**
High quality LED 2835 chips, delivering 120 lumens per watt on the system level, mounted on a metal heatsink for thermal management.

04 **Mounting options**
Surface mount brackets included.

BUILD A PART NUMBER

• SERIES	• LIGHT OUTPUT	• CCT	• LENGTH IN INCHES	• LENS TYPE	• STANDARD OPTIONS
• 81L					
• 81L	• S = Selectable	• S = Selectable	• 48″ NOM..	• 2 = SMOOTH FROSTED PC	• SS STAINLESS STEEL LENS BRACKET LATCH • NA = Not BAA compliant

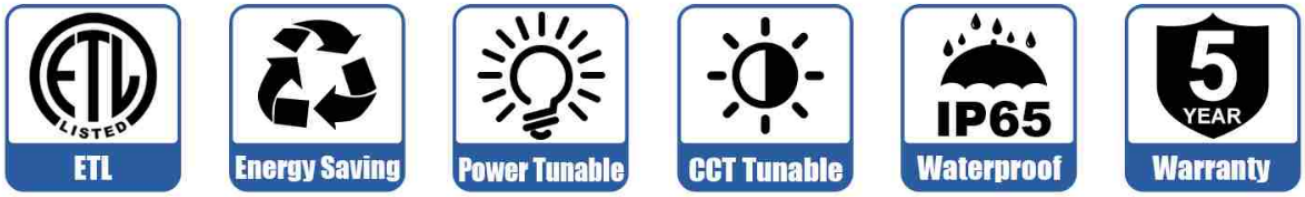

QUICKINSTALLATION

1. Marklocation for mounting holes

2. Snap the fixture shell into place

3. Nut reinforcementinstallation