

WORLDWIDE SUPER FORTRESS UL RATED TRTL-30x6 HIGH SECURITY SAFE

SPECIFICATIONS

BODY: The safe has a total body thickness of 4". High strength alloys and our proprietary barrier material combine to provide multi-layer protection designed to withstand the most sophisticated attack by tools, torch or explosives.

DOOR: The door has a thickness of 7". The same high strength alloys and proprietary barrier material used to protect the body are repeated in the door.

LOCKS: Dual (2) U.L. listed manipulation resistant high strength UL Rated mechanical combination locks with spy proof dial are used on all TRTL30X6 safes.

BOLTWORK: Massive 1 1/2" diameter chromed high tensile steel bolts are driven both vertically through reinforced bolt chambers. The hinge side of the door is protected by a row of dead bolts that fit into similar reinforced bolt chambers. The opening side is protected by a full height locking bar to help prevent a pry/punch attack.

GLASS RELOCKERS: A large tempered glass plate is used to protect vital areas of the locking mechanism. If attacked, the glass will shatter and cause the relockers to activate thereby preventing the safe from being opened.

The **WORLDWIDE UL-TRTL-30X6** is finished in a highly advanced epoxy paint that has a built-in anti-corrosive primer. The standard color is a dusk gray with black and stainless steel accents. The safes include standard adjustable and removable shelves (see chart on reverse).

OPTIONS

- UL-Type 1 Electronic Access Control Safe Locks available as redundancies
- Lockable Compartments



WORLDWIDE SUPER FORTRESS UL RATED TRTL-30x6 HIGH SECURITY SAFE

MODEL	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS					
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	WEIGHT	SHELF	CUBIC CAP.
TRX-252016	25"	20"	16"	33.5"	29"	29"	1155 LBS	2	4.6
TRX-352020	35"	20"	20"	43.5"	29"	33"	1659 LBS	3	8.1
TRX-352420	35"	24"	20"	43.5"	33"	33"	1848 LBS	3	9.7
TRX-452020	45"	20"	20"	53.5"	29"	33"	2310 LBS	3	10.4
TRX-452420	45"	24"	20"	53.5"	33"	33"	2678 LBS	4	12.5
TRX-552020	55"	20"	20"	63.5"	29"	33"	2709 LBS	4	12.7
TRX-552420	55"	24"	20"	63.5"	33"	33"	3119 LBS	5	15.3
TRX-652020	65"	20"	20"	73.5"	29"	33"	3350 LBS	5	14.8
TRX-652420	65"	24"	20"	73.5"	33"	33"	4058 LBS	5	18.1
TRX-652820	65"	28"	20"	73.5"	37"	33"	4547 LBS	5	21.1
TRX-683120	68"	31"	20"	76.5"	40"	33"	5145 LBS	5	24.4
TRX-683626	68"	36"	26"	76.5"	45"	39"	5744 LBS	6	36.8
TRX-723626	72"	36"	26"	80.5"	45"	39"	6342 LBS	6	42.3


ADD 2 1/2" FOR HANDLE AND LOCK PROTRUSION. OUR POLICY IS ONE OF CONSTANT IMPROVEMENT.
WE THEREFORE RESERVE THE RIGHT TO INCORPORATE ANY CHANGES WITHOUT PRIOR NOTICE



WORLDWIDE SUPER FORTRESS UL RATED TRTL-30x6 HIGH SECURITY SAFE

DOOR SWING PROJECTIONS

MODEL	A	B	C
TRX-252016	14"	58"	55.5"
TRX-352020	14"	62"	55.5"
TRX-352420	18"	66"	63.5"
TRX-452020	14"	62"	55.5"
TRX-452420	18"	66"	63.5"
TRX-552020	14"	62"	55.5"
TRX-552420	18"	66"	63.5"
TRX-652020	14"	62"	55.5"
TRX-652420	18"	66"	63.5"
TRX-652820	22"	70"	71.5"
TRX-683120	25"	73"	77.5"
TRX-683626	30"	84"	87.5"
TRX-723626	30"	84"	87.5"

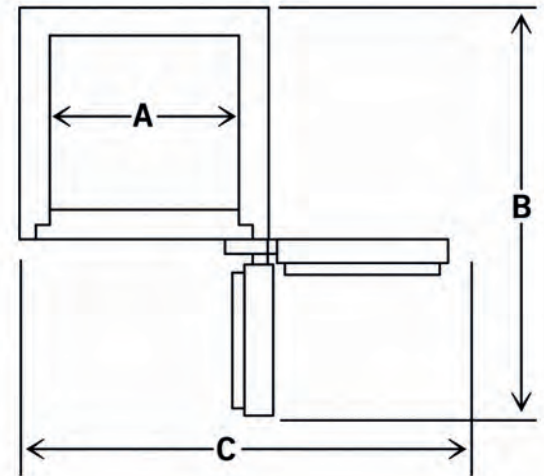



WORLDWIDE SUPER FORTRESS UL RATED TRTL-30x6 HIGH SECURITY SAFE

WORLDWIDE SAFE: Advanced security built to meet and exceed your requirements while providing you, the valued customer, with ultimate peace of mind.

Worldwide Safe & Vault is one of the largest providers of **UL RATED** (Underwriter Laboratories) Safes and Modular Vaults, across the US, Canada and the Caribbean.

All of our **UL RATED** safes are strenuously tested by Underwriter Laboratories and exceed the most current testing standards.

Our **UL RATED** Safes and Modular Vaults **GUARANTEE** insurability with US and overseas insurance companies and underwriters. Safes without UL Ratings DO NOT guarantee insurability.

Worldwide Safe is a turnkey provider, **shipping, delivering, and installing globally**. We also provide **24/7 service**, including after hours and emergency service.