

External Fall Protection

Skylight Fall Protection



Model ESFP

AVAILABLE CERTIFICATIONS

Designed and tested to comply with OSHA General Industry Standard.




Warranty: 10 year and 15 year limited warranty available. Complete warranty terms located at www.sunoptics.com

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

PRODUCT PROFILE

Details Not To Scale

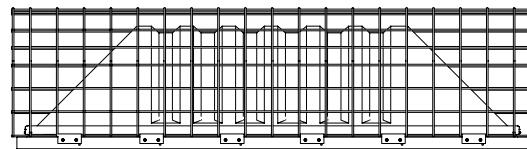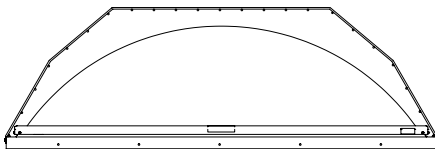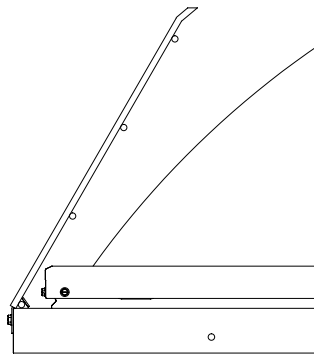

SPECIFICATIONS

Safety / Security Guard shall be Sunoptics model ESFP as supplied by Sunoptics, Inc., 20215 Rifle Range Rd., Tallahassee, AL 36078 | (800) 289-4700

ESFP (External Skylight Fall Protection) shall be fabricated from 3 gauge (.244" diameter) galvanized steel, 4" maximum on center in both directions, having a 125,000 PSI tensile strength. (Meets OSHA Fall Protection Standards)

All Safety / Security Guards shall be ready for installation. All Guard assemblies shall include Guard, #8 x 1/2" TEK screws and installation clips.

Fixture		ID Frame Callout		Inside Frame Width		Inside Frame Length		Options
ESFP	External Skylight Fall Protection	4040	51-1/4" x 51-1/4"	W51.250	51.250"	L51.250	51.250"	(blank) Sunoptics Skylight Frame
		4060	51-1/4" x 75-1/4"	W51.250	51.250"	L75.250	75.250"	
		4070	51-1/4" x 87-1/4"	W51.250	51.250"	L87.250	87.250"	
		4080	52-1/4" x 100-1/4"	W52.250	52.250"	L100.250	100.250"	
		5060	63-5/8" x 75-5/8"	W63.625	63.250"	L75.625	75.625"	
		5558	67-3/4" x 70-3/4"	W67.750	68.750"	L70.750	70.750"	
		5070	63-1/4" x 87-1/4"	W63.250	63.250"	L87.250 2PCS	87.250"	

