Install your waste monitor.

Screw mounting, alternative tape mounting, and returns.

BEFORE YOU START

Match the label to the dumpster.

- ✓ Trash or recycling
- ✓ Dumpster size
- ✓ Address

Included in your kit



1x

Monitor

Preconfigured



1x

1/4-inch drill bit

For the two holes



1x

T25 driver bit

For the screws



2x

Machine screws


Insert from outside



2x

Lock washers

One per screw



1x

Drilling template

98 mm hole spacing



2x

Double-sided tape

4 inches per strip




1x

Return label

For the return box

Bring these tools



Drill

Use the included bits.



Marker

For marking both holes.



Ladder, if needed


2 & 4 yard: usually not needed.
6 & 8 yard: use a 6-foot ladder.

Work from outside. Use a stable ladder; avoid overreaching. Wear eye protection when drilling.

1 Choose the location

Face the front of the dumpster. Use the right-hand wall.

VIEW FROM ABOVE

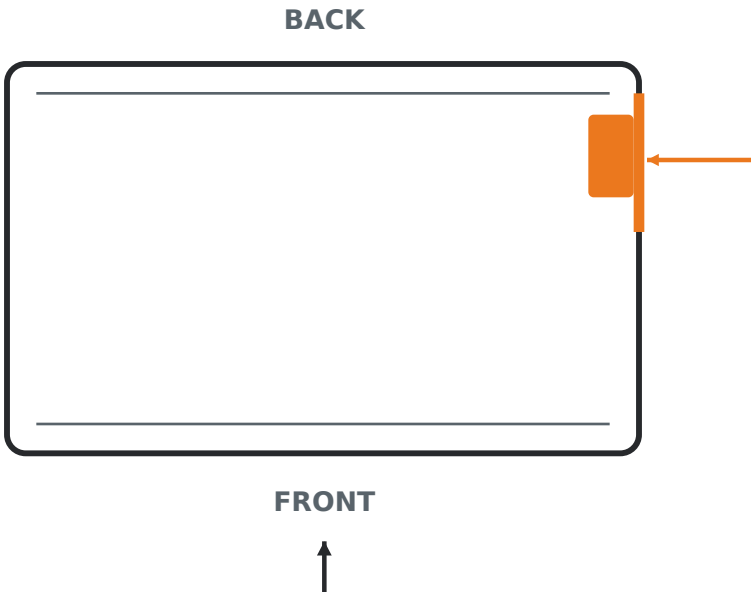


INSIDE, RIGHT WALL

Toward the back, as far as you can safely reach.

6 YARDS & SMALLER

RIGHT WALL, SIDE VIEW

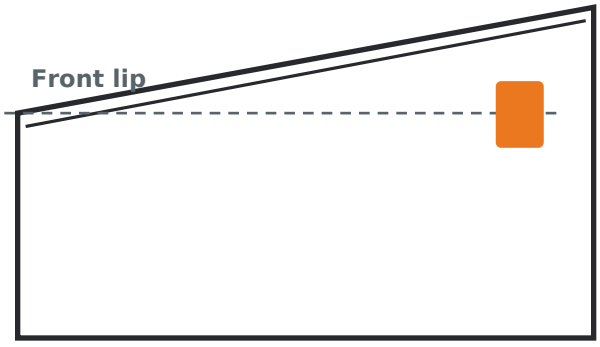


Level with or just above the front lip.

SCREWS: CONTINUE TO PAGE 3

8 YARDS

RIGHT WALL, SIDE VIEW

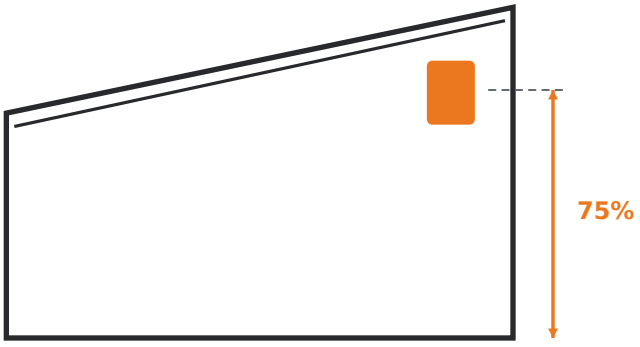


Roughly 75% of the way up the wall.

TAPE: SKIP TO PAGE 5

2 Mark both holes

Hold the included template level on the outside of the selected wall. Mark both hole centers.

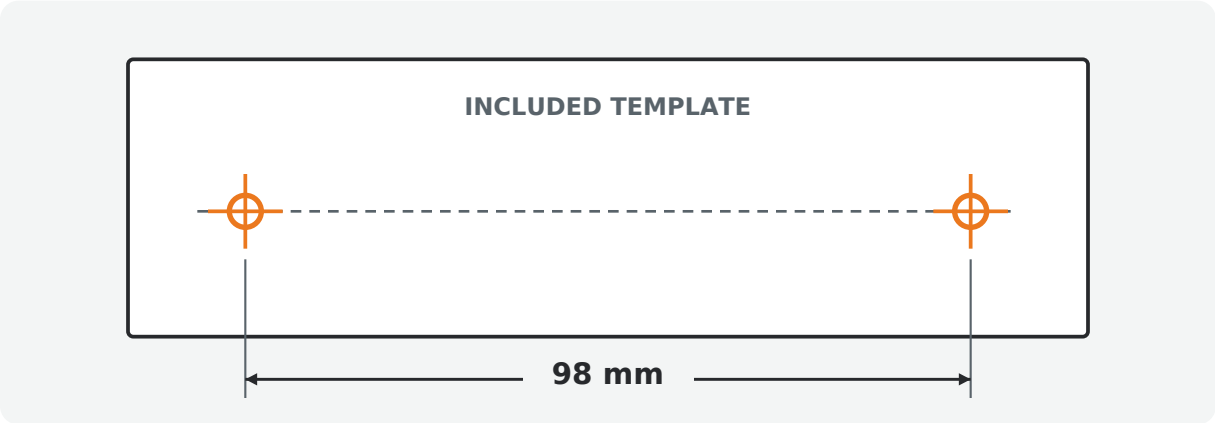


Horizontal, center to center

Use the supplied template. This page is not a drill template.

3 Drill two holes

Use the included 1/4-inch drill bit at both marked points.

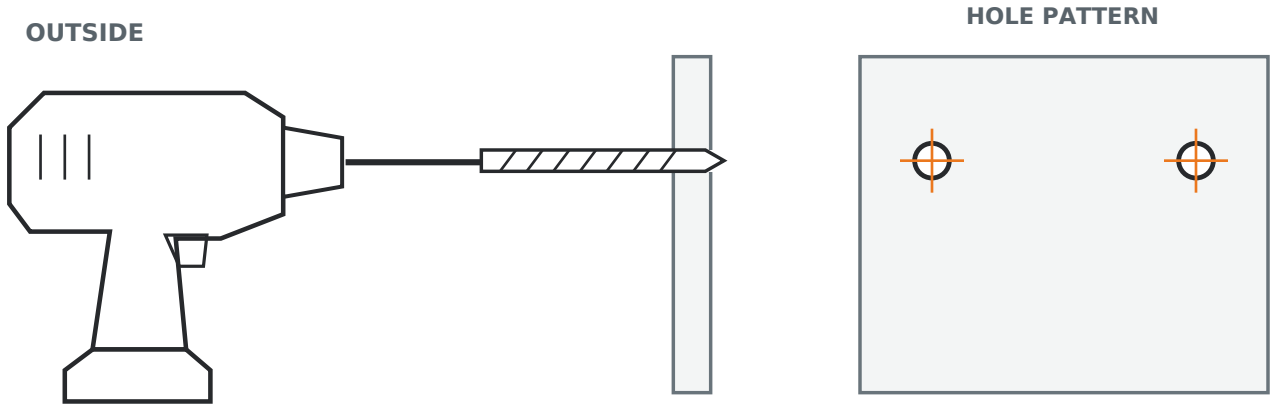


2 holes

1/4 inch diameter

Keep hands and the monitor clear of the drill bit.


4 Fasten the monitor

Hold the monitor inside and align it with the drilled holes.
From outside, place one lock washer on each machine screw.
Insert both screws through the wall into the monitor.

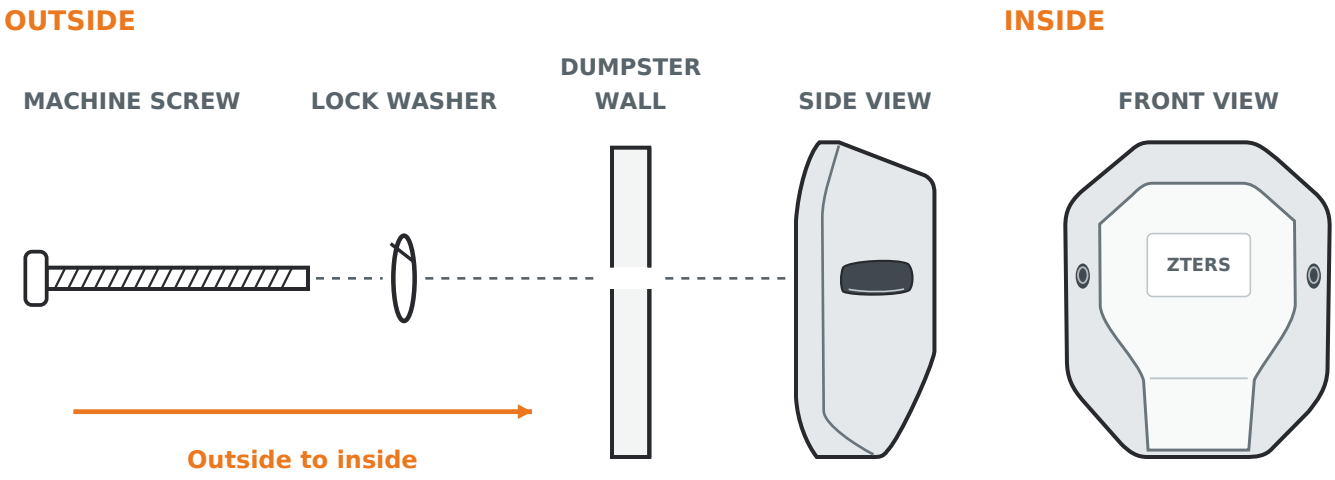

Tighten with the T25 bit until each lock washer lies flat.

Mounted orientation

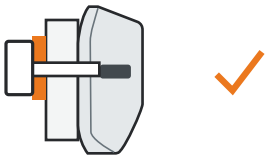

WASHER FLAT AGAINST WALL

5 Confirm installation

Go to wasteaudit.ai and log in to the customer portal.
Confirm that the matching monitor is installed.

wasteaudit.ai

Scan to open the customer portal.

Log in. Match the monitor. Confirm.

Installed

Installation complete.

Alternative: tape mounting


Use the two included 4-inch strips of double-sided tape.
Choose the location in Step 1, then follow this page instead of Steps 2–4.

WARNING: LESS SECURE

Tape mounting is less secure than screws. The monitor may be knocked off. If it is knocked off, the monitor cost will not be refunded.

A Prepare the surface


Remove dirt, grease, and loose debris from the dumpster wall and the monitor’s mounting surface. Both surfaces must be clean and completely dry.

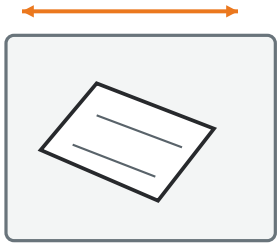

CLEAN + DRY

B Apply both strips


Peel one liner from each strip and apply both strips to the monitor’s mounting surface. Remove the remaining liners before mounting.



4 INCHES EACH

C Press into place

Position the monitor inside the dumpster at the selected location. Press firmly along both strips and check that the monitor is attached.



PRESS FIRMLY


Finish with Step 5 on page 4: confirm installation in the customer portal.

Remove and return

Keep the box. An included return label makes sending the monitor back easy.


A Remove the monitor

Support the monitor from inside the dumpster.
Screw mounting: loosen and remove both screws from outside using the T25 bit.
Tape mounting: gently release the tape and lift the monitor away.

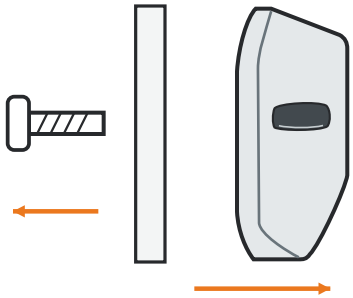


B Pack and label

Place the monitor in the original box. Close the box securely and attach the included return label, covering any old shipping label.

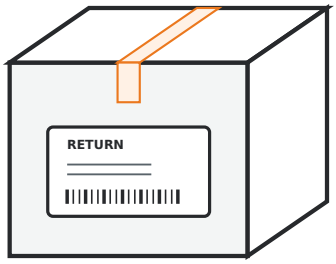

C Drop off with the carrier

Take the package to a drop-off location for the carrier shown on the return label.

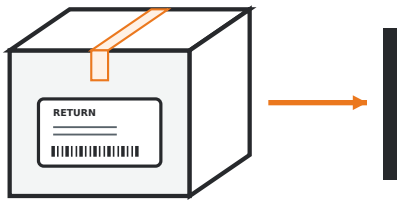

Use the included return label for your shipment.