
NIAGARA CONSERVATION®

THE ORIGINAL™

SINGLE FLUSH ROUND 12" N7714



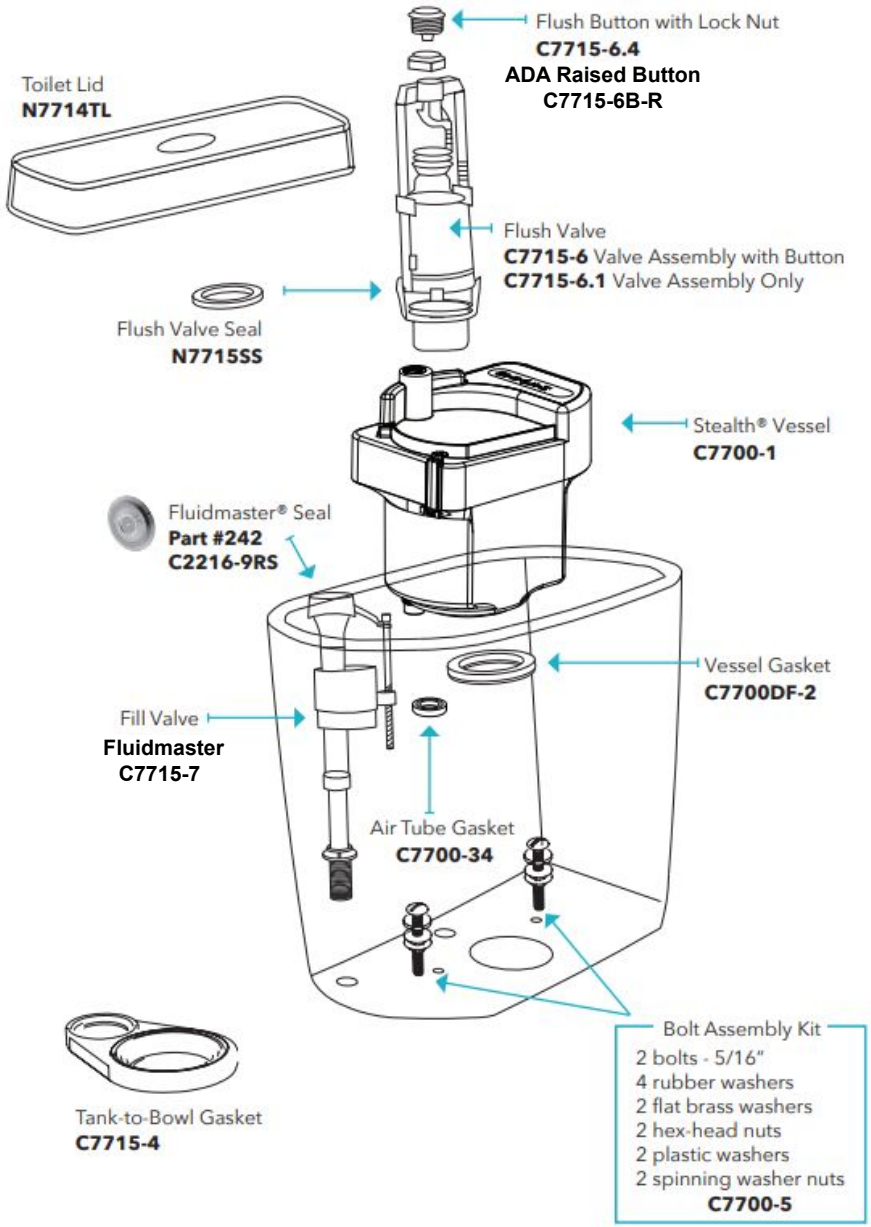


NIAGARA CONSERVATION®



STEALTH®

THE ORIGINAL 0.8 GPF SINGLE FLUSH ELONGATED BOWL

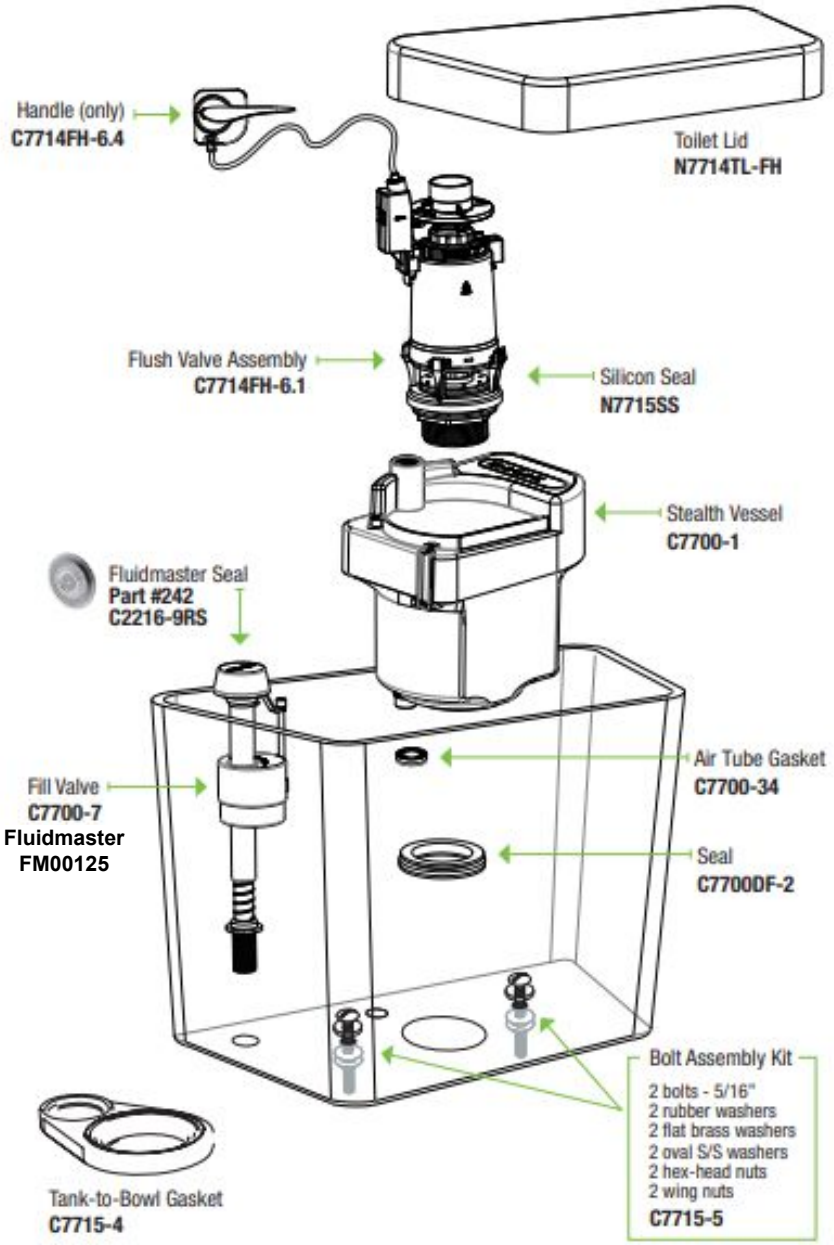

NIAGARA CONSERVATION®

WATER MANAGEMENT INC.







Transfer Tube



Because the Niagara Stealth toilet has a Transfer Tube that acts as a vacuum, a plunger should not be used on this toilet when a clog is present. The plunger will push waste into the tank. Instead, use a snake brush to clear any clogs.

Toilet Bowl Trap Snake Brush



WATER MANAGEMENT INC.

Fluidmaster®



Plugged Refill

Refill Tube

Niagara Stealth 0.8 gpf toilets require a 100% restricted 400A fill valve or a plugged fill valve.



WATER MANAGEMENT INC.

Fluidmaster®


Plugged Refill



The black rubber insert was designed to quiet the flush of Stealth toilets. After time with normal use, these inserts will swell and cause longer fill rates.

The clear plastic alternative will also quiet the flush while being resistant to swelling.

Refill Bottom

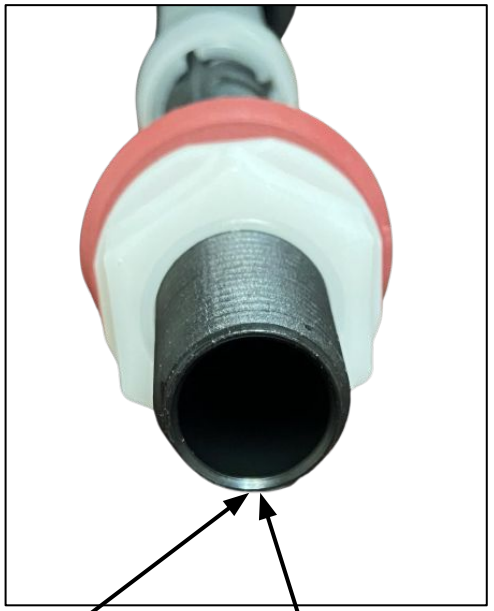





WATER MANAGEMENT INC.



Old 242 Seal Placed in Cap

Swollen and Warped 242 Seal Removed from Fill Valve





Old 242 Seal Outside of Cap


Brand New OEM 242 Seal for Installation



Fluidmaster®

Used Niagara Stealth Tank Seals
Part # N7715SS

Over time, the tank seals in Niagara Stealth toilets can blister, which can cause leaks.

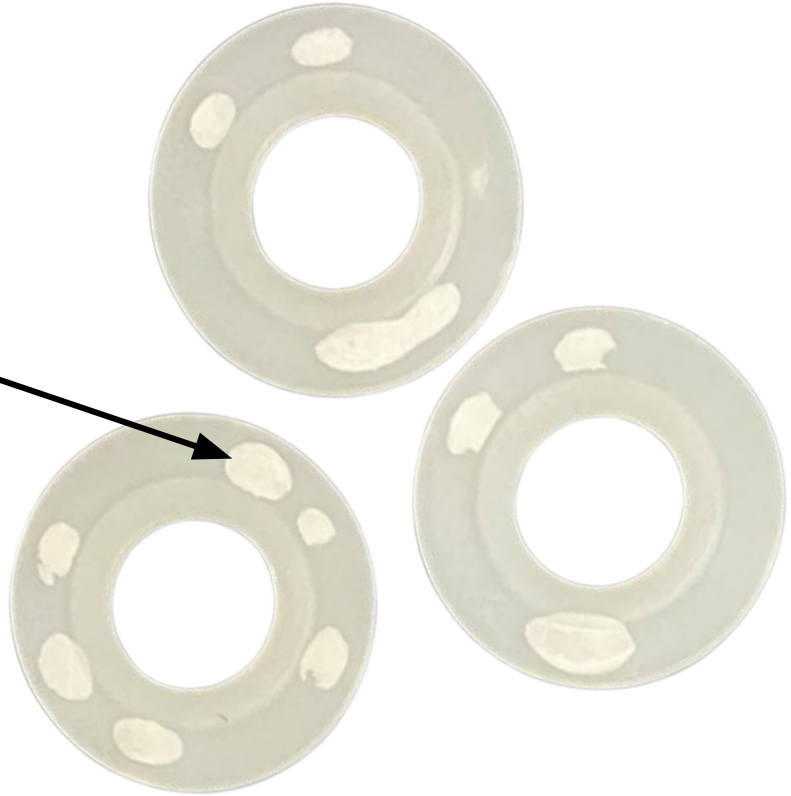

Buy replacement seals at
Watermgtshop.com